

CE EMC Test Report



(Declaration of Conformity)

For
Electromagnetic compatibility
Of

Product : PMA Graphene Silk Heating Belly Belt

Trade Mark : PMA

Model Number : PMA-D11, PMA-D10

Prepared for

Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.

No.16 Building International E-commerce Industrial Estate, No.1201 HuGuang East Rd,
Shushan District, Hefei city, Anhui, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an
District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's Name: Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.

Address.....: No.16 Building International E-commerce Industrial Estate,
No.1201 HuGuang East Rd, Shushan District, Hefei city,
Anhui, China

Manufacturer's Name: Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.

Address.....: No.16 Building International E-commerce Industrial Estate,
No.1201 HuGuang East Rd, Shushan District, Hefei city,
Anhui, China

Factory's Name: Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.

Address.....: No.16 Building International E-commerce Industrial Estate,
No.1201 HuGuang East Rd, Shushan District, Hefei city,
Anhui, China

Product description

Product name: PMA Graphene Silk Heating Belly Belt

Model and/or type reference: PMA-D11, PMA-D10

Standards: EN 55014-1: 2006+A1: 2009+A2: 2011
EN 55014-2: 2015

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test

Date (s) of performance of tests: 30 Jun 2018~13 Jul. 2018

Date of Issue.....: 13 Jul. 2018

Test Result.....: **Pass**

Testing Engineer :

Korka Lin

(Korka Lin)

Technical Manager :

Sky Zhang

(Sky Zhang)

Authorized Signatory :

Sam Chen

(Sam Chen)



Table of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 DESCRIPTION OF TEST SETUP	9
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	10
2.5 MEASUREMENT INSTRUMENTS LIST	11
3 . EMC EMISSION TEST	12
3.1 RADIATED EMISSION MEASUREMENT	12
3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	12
3.1.2 LIMITS OF DISTURBANCE POWER MEASUREMENT	12
3.1.3 TEST PROCEDURE	13
3.1.4 TEST SETUP	14
3.1.5 EUT OPERATING CONDITIONS	14
3.1.6 TEST RESULTS (30MHz ~1000MHz)	15
4 . EMC IMMUNITY TEST	17
4.1 STANDARD COMPLIANCE/ SEVERITY LEVEL/ CRITERIA	17
4.2 GENERAL PERFORMANCE CRITERIA	18
4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP	18
4.4 ESD TESTING	19
4.4.1 TEST SPECIFICATION	19
4.4.2 TEST PROCEDURE	19
4.4.3 TEST SETUP	20
4.4.4 TEST RESULTS	21
5 . EUT TEST PHOTO	22
ATTACHMENT PHOTOGRAPHS OF EUT	23

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
EN 55014-1: 2006+A1:2009+A2:2011	Conducted Emission	-----	N/A	
	Radiated Emission	-----	PASS	
EMC Immunity				
Section EN55014-2: 2015	Test Item	Performance Criteria	Judgment	Remark
EN 61000-4-2	Electrostatic Discharge	B	PASS	
EN 61000-4-3	RF electromagnetic field	A	N/A	NOTE (2)
EN 61000-4-4	Fast transients	B	N/A	
EN 61000-4-5	Surges	B	N/A	
EN 61000-4-6	Injected Current	A	N/A	
EN 61000-4-11	Volt. Interruptions Volt. Dips	C / C / C	N/A	NOTE (3)

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) This test is not required when the EUT is judged to be category III according to EN55014-2.
- (3) Voltage Interruption: 100% reduction – Performance Criteria C
Voltage dip: 30% reduction – Performance Criteria C
Voltage dip: 60% reduction – Performance Criteria C
- (4) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516

IC-Registration : The Certificate Registration Number is 9270A-1

FCC- Accredited : Test Firm Registration Number: 463705
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

Test Item	Measurement Frequency Range	K	U(dB)
AC Mains Conducted Emission	0.009kHz ~ 0.15MHz	2	2.66
AC Mains Conducted Emission	0.15MHz ~ 30MHz	2	2.80
Telecom Conducted Emission (Cat 3)	0.15MHz ~ 30MHz	2	2.40
Telecom Conducted Emission (Cat 5)	0.15MHz ~ 30MHz	2	2.58
Radiated Emission	30MHz ~ 1000MHz	2	2.64
Radiated Emission	1000MHz ~ 6000MHz	2	2.40
Radiated Emission	6000MHz ~ 18000MHz	2	2.52
Power Clamp	30MHz ~ 300MHz	2	2.20

Revision History

[illegible]

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	PMA Graphene Silk Heating Belly Belt	
Model Name	PMA-D11	
Additional Model Number(s)	PMA-D10	
Model Difference	All models are identical except model color.	
Product Description	The EUT is a PMA Graphene Silk Heating Belly Belt.	
	Operating frequency:	N/A
	Connecting I/O port:	N/A
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as a Household Device. More details of EUT technical specifications, please refer to the User's Manual.	
Power Source	DC Voltage	
Power Rating	DC 5V, 1~2A powered by Micro USB port	

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Working

For Radiated Test	
Final Test Mode	Description
Mode 1	Working

For EMS Test	
Final Test Mode	Description
Mode 1	Working

2.3 DESCRIPTION OF TEST SETUP

Mode RE: Working

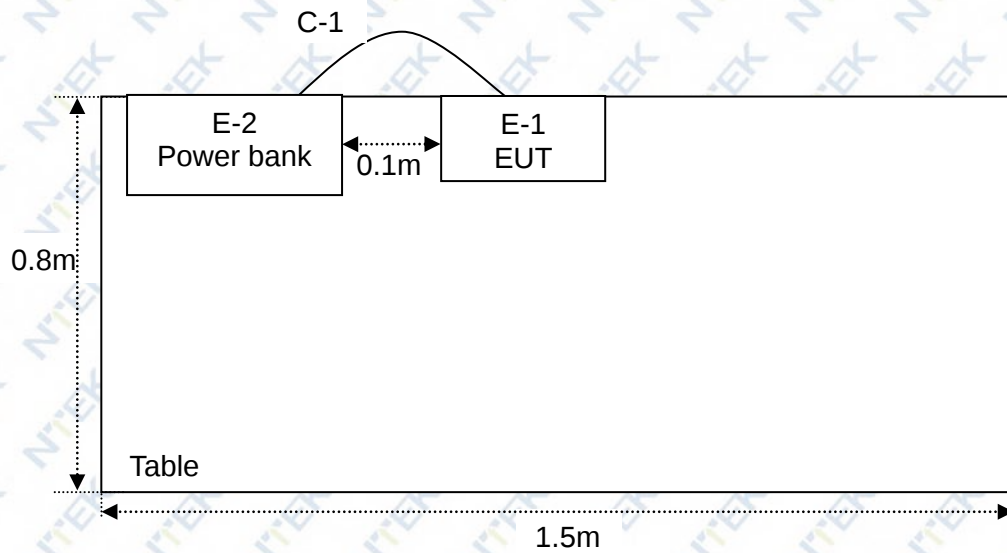

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	PMA Graphene Silk Heating Belly Belt	PMA	PMA-D11	N/A	EUT
E-2	Power bank	N/A	N/A	N/A	

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	20cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) 'YES' means 'shielded' 'with core'; 'NO' means 'unshielded' 'without core'.

2.5 MEASUREMENT INSTRUMENTS LIST

2.5.1 RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Antenna Mast	SKET	N/A	N/A	N/A	N/A	N/A
2	Antenna Mast	EM	SC100	N/A	Apr. 26, 2017	Apr. 25, 2020	3 years
3	50Ω Switch	Anritsu	MP59B	6200983705	May 19, 2018	May 18, 2020	2 years
4	Test Cable	N/A	R-01	N/A	Aug. 08, 2016	Aug. 07, 2019	3 years
5	Test Cable	N/A	R-03	N/A	Jun. 26, 2016	Jun. 25, 2019	3 years
6	EMI Test Receiver	R&S	ESCI	101160	May 19, 2018	May 18, 2019	1 year
7	Bilog Antenna	TESEQ	CBL6111D	31216	Apr. 08, 2018	Apr. 07, 2019	1 year
8	Broadband Horn Antenna	EM	EM-AH-10180	2011071402	Apr. 08, 2018	Apr. 07, 2019	1 year
9	Spectrum Analyzer	Agilent	E4440A	MY41000130	Mar. 28, 2018	Mar. 28, 2019	1 year
10	Pre-Amplifier	EMC	EMC051835S E	980246	Aug. 07, 2017	Aug. 06, 2018	1 year
11	50Ω Switch	Anritsu	MP59B	6200983704	May 19, 2018	May 18, 2020	2 years
12	Test Cable	N/A	P-01	N/A	Jun. 26, 2016	Jun. 25, 2019	3 years
13	Absorbing Clamp	R&S	MDS-21	100423	Oct. 30, 2017	Oct. 29, 2018	1 year

2.5.2 ESD

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	ESD TEST GENERATOR	Lioncel	ESD-203B	ESD203B015 0402	Oct. 30, 2017	Oct. 29, 2018	1 year

3. EMC EMISSION TEST

3.1 RADIATED EMISSION MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

FREQUENCY (MHz)	☐ At 10m	☒ At 3m
	dB μ V/m	dB μ /m
30 – 230	30	40
230 – 1000	37	47

3.1.2 LIMITS OF DISTURBANCE POWER MEASUREMENT (Below 1000MHz)

Household and similar appliances			Tools					
Frequency Range			Rated motor power not exceeding 700 W		Rated motor power above 700 W and not exceeding 1 000 W		Rated motor power above 1 000 W	
(MHz)	dB(pW) Quasi-peak	dB (pW) Average *	dB (pW) Quasi-peak	dB (pW) Average *	dB (pW) Quasi-peak	dB (pW) Average *	dB (pW) Quasi-peak	dB (pW) Average *
30-300	44-55	35-45	44-55	35-45	49-59	39-49	55-65	45-55

* If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

Notes:


- (1) The limit for radiated test was performed according to as following: CISPR 14.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB μ V/m)=20log Emission level (uV/m).

3.1.3 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz.

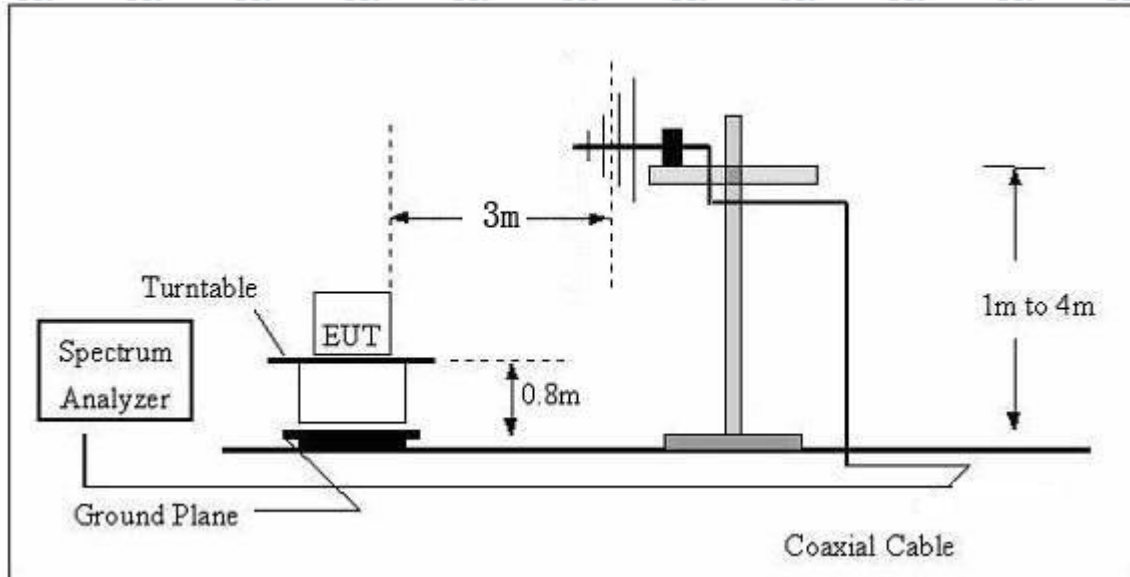

(B) Radiated Emission Test Set-Up Frequency Above 30 MHz

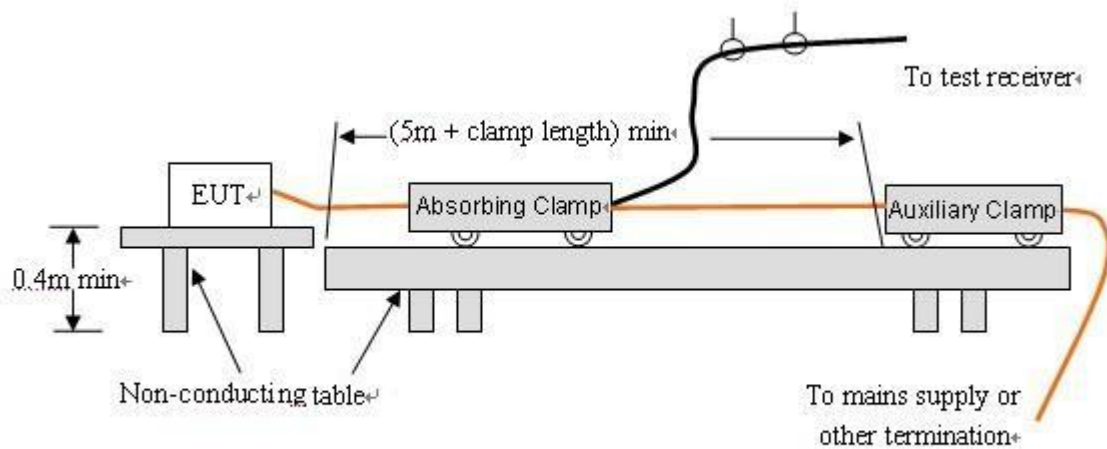


3.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.1.6 TEST RESULTS (30MHz ~1000MHz)


EUT:	PMA Graphene Silk Heating Belly Belt	Model Name:	PMA-D11
Temperature:	19℃	Relative Humidity:	69%
Pressure:	1010hPa	Test Date :	2018-07-02
Test Mode:	Working	Test Port:	Horizontal
Test Power:	DC 5V powered by Power bank		

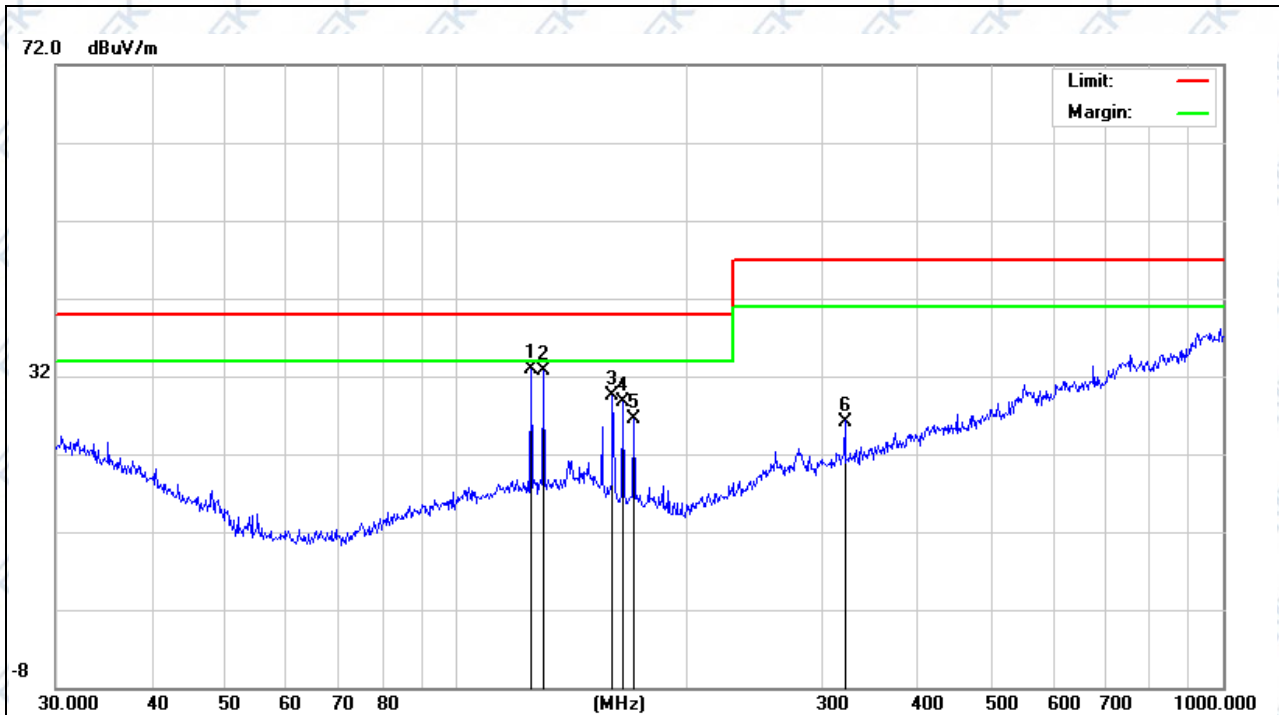

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1	*	125.0066	19.56	13.32	32.88	40.00	-7.12	QP		
2		129.9225	19.16	13.46	32.62	40.00	-7.38	QP		
3		159.7844	17.85	11.61	29.46	40.00	-10.54	QP		
4		164.9074	17.29	11.41	28.70	40.00	-11.30	QP		
5		170.1947	15.15	11.34	26.49	40.00	-13.51	QP		
6		321.0607	9.66	16.54	26.20	47.00	-20.80	QP		

Remark:
Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Silk Heating Belly Belt	Model Name:	PMA-D11
Temperature:	26°C	Relative Humidity:	69%
Pressure:	1010hPa	Test Date :	2018-07-02
Test Mode:	Working	Test Port:	Vertical
Test Power:	DC 5V powered by Power bank		

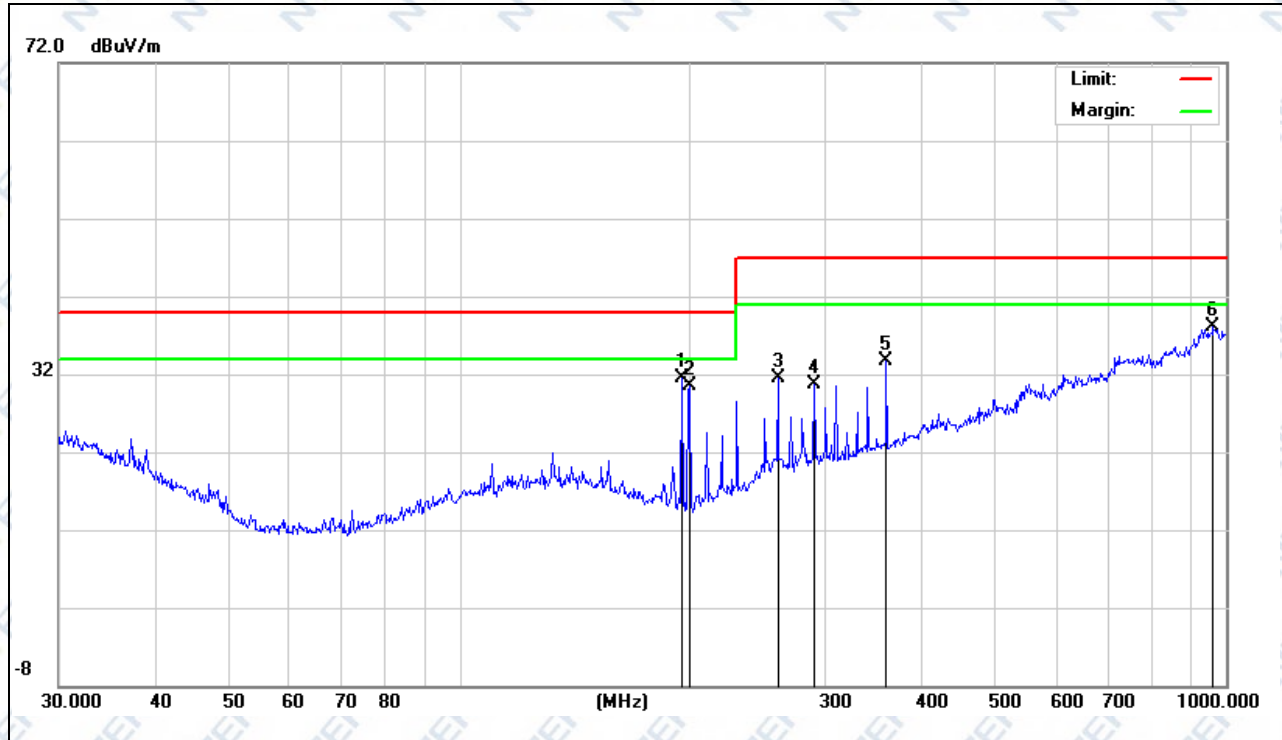

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1	*	195.1365	21.69	9.83	31.52	40.00	-8.48	QP		
2		199.2855	20.73	9.77	30.50	40.00	-9.50	QP		
3		260.1444	15.24	16.35	31.59	47.00	-15.41	QP		
4		290.0172	15.02	15.63	30.65	47.00	-16.35	QP		
5		360.4476	15.84	17.87	33.71	47.00	-13.29	QP		
6		962.1622	6.99	31.17	38.16	47.00	-8.84	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

4. EMC IMMUNITY TEST

4.1 STANDARD COMPLIANCE/ SEVERITY LEVEL/ CRITERIA

Tests Standard No.	TEST SPECIFICATION	Test Mode Test Ports	Perform. Criteria
1. ESD IEC/EN 61000-4-2	8kV air discharge 4kV contact discharge	Direct Mode	B
	4kV HCP discharge 4kV VCP discharge	Indirect Mode	B

4.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55014-2** standard, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of 2.3 Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 ESD TESTING

4.4.1 TEST SPECIFICATION

Basic Standard:	IEC/EN 61000-4-2
Discharge Impedance:	330ohm / 150pF
Required Performance:	B
Discharge Voltage:	Air Discharge:2kV/4kV/8kV (Direct) Contact Discharge:2kV/4kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point Contact Discharge: min. 20 at each test point
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

4.4.2 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. Contact discharge was applied to conductive surfaces and coupling planes of the EUT. During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second. The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges.

If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):


The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

- b. Air discharges at insulation surfaces of the EUT.

It was at least ten single discharges with positive and negative at the same selected point.

4.4.3 TEST SETUP

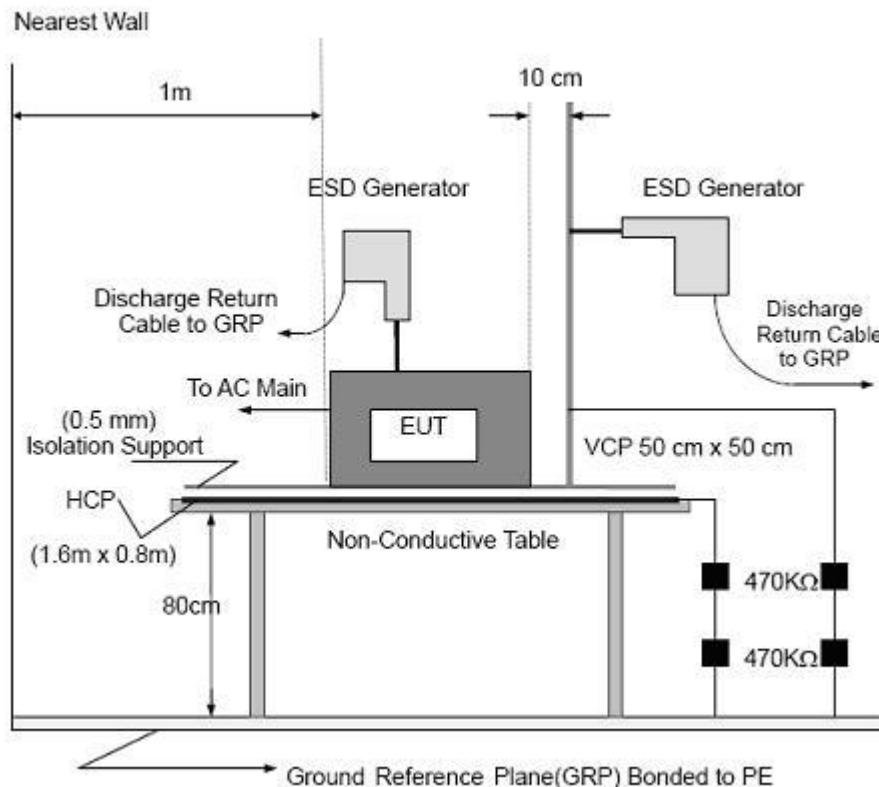

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

4.4.4 TEST RESULTS

EUT:	PMA Graphene Silk Heating Belly Belt	Model Name:	PMA-D11
Temperature:	25°C	Relative Humidity:	51%
Pressure:	1010hPa	Test Date :	2018-07-04
Test Mode:	Working		
Test Power:	DC 5V powered by Power bank		

Mode	Contact Discharge (Indirect)							Criterion	Result
Test level(kV)	Test Point	2		4		6			
Test Location		+	-	+	-	+	-		
HCP	Front	P	P	P	P			B	Complies
	Rear	P	P	P	P				
	Left	P	P	P	P				
	Right	P	P	P	P				
VCP	Front	P	P	P	P				
	Rear	P	P	P	P				
	Left	P	P	P	P				
	Right	P	P	P	P				

Mode	Air Discharge								Contact Discharge								Criterion	Result
Test level(kV)	2		4		8		15		2		4		6		8			
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
Gap	P	P	P	P	P	P											B	Complies
Button	P	P	P	P	P	P												
LED	P	P	P	P	P	P												
Micro USB port									P	P	P	P						

Note:

- 1) +/- denotes the Positive/Negative polarity of the output voltage.
- 2) Test location(s) in which discharge (Air and contact discharge) to be applied illustrated by photos shown in next page(s)
- 3) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.
- 4) Criteria A: Normal performance within limits specified by the manufacturer, requestor or purchaser.
- 5) Criteria B: Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the EUT recovers its normal performance, without operator intervention.
- 6) Criteria C: Temporary loss of function or degradation of performance, the correction of which requires operator intervention.
- 7) Criteria D: Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.

5. EUT TEST PHOTO

Radiated Measurement Photos



ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1



Photo 2



Photo 3



Photo 4



Photo 5



Photo 6



Photo 7

