

CE EMC Test Report



(Declaration of Conformity)

For
Electromagnetic compatibility
Of

Product : PMA Graphene Multi-function Heating Blanket

Trade Mark : N/A

Model Number : PMA-B21, PMA-B20

Prepared for

Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.

No.16 Building International E-commerce Industrial Estate, No.1201 HuGuang East Rd,
Shushan District, Hefei city, Anhui, China

Prepared by

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an
District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

TEST RESULT CERTIFICATION

Applicant's Name: Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.
 No.16 Building International E-commerce Industrial Estate,
Address: No.1201 HuGuang East Rd, Shushan District, Hefei city, Anhui,
 China
Manufacturer's Name: Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.
 No.16 Building International E-commerce Industrial Estate,
Address: No.1201 HuGuang East Rd, Shushan District, Hefei city, Anhui,
 China
Factory's Name: Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.
 No.16 Building International E-commerce Industrial Estate,
Address: No.1201 HuGuang East Rd, Shushan District, Hefei city, Anhui,
 China

Product description

Product name: PMA Graphene Multi-function Heating Blanket

Model and/or type reference : PMA-B21, PMA-B20

Standards: EN 55014-1: 2006+A1: 2009+A2: 2011

EN 55014-2: 2015

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

Date of Test:

Date (s) of performance of tests: 11 Jan. 2018 ~ 09 Mar. 2018

Date of Issue: 09 Mar. 2018

Test Result: **Pass**

Note: This verification supersedes verification with Verification/Report number(s):
 SEE180111901001E.

Testing Engineer :

Estelle Chen

(Estelle Chen)

Technical Manager :

Sky Zhang

(Sky Zhang)

Authorized Signatory :

Sam Chen

(Sam Chen)

Table of Contents	Page
1 . TEST SUMMARY	4
1.1 TEST FACILITY	5
1.2 MEASUREMENT UNCERTAINTY	5
2 . GENERAL INFORMATION	7
2.1 GENERAL DESCRIPTION OF EUT	7
2.2 DESCRIPTION OF TEST MODES	8
2.3 DESCRIPTION OF TEST SETUP	9
2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL	10
2.5 MEASUREMENT INSTRUMENTS LIST	11
3 . EMC EMISSION TEST	12
3.1 RADIATED EMISSION MEASUREMENT	12
3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT	12
3.1.2 LIMITS OF DISTURBANCE POWER MEASUREMENT	12
3.1.3 TEST PROCEDURE	12
3.1.4 TEST SETUP	13
3.1.5 EUT OPERATING CONDITIONS	13
3.1.6 TEST RESULTS (30MHz ~1000MHz)	14
4 . EMC IMMUNITY TEST	28
4.1 STANDARD COMPLIANCE/ SEVERITY LEVEL/ CRITERIA	28
4.2 GENERAL PERFORMANCE CRITERIA	29
4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP	29
4.4 ESD TESTING	30
4.4.1 TEST SPECIFICATION	30
4.4.2 TEST PROCEDURE	30
4.4.3 TEST SETUP	31
4.4.4 TEST RESULTS	32
5 . EUT TEST PHOTO	34
ATTACHMENT PHOTOGRAPHS OF EUT	35

1. TEST SUMMARY

Test procedures according to the technical standards:

EMC Emission				
Standard	Test Item	Limit	Judgment	Remark
EN 55014-1: 2006+A1:2009+A2:2011	Conducted Emission	-----	N/A	
	Radiated Emission	-----	PASS	
EMC Immunity				
Section EN55014-2: 2015	Test Item	Performance Criteria	Judgment	Remark
EN 61000-4-2	Electrostatic Discharge	B	PASS	
EN 61000-4-3	RF electromagnetic field	A	N/A	NOTE (2)
EN 61000-4-4	Fast transients	B	N/A	
EN 61000-4-5	Surges	B	N/A	
EN 61000-4-6	Injected Current	A	N/A	
EN 61000-4-11	Volt. Interruptions Volt. Dips	C / C / C	N/A	NOTE (3)

NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) This test is not required when the EUT is judged to be category III according to EN55014-2.
- (3) Voltage Interruption: 100% reduction – Performance Criteria C
Voltage dip: 30% reduction – Performance Criteria C
Voltage dip: 60% reduction – Performance Criteria C
- (4) For client's request and manual description, the test will not be executed.

1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)
The Certificate Registration Number is L5516

IC-Registration : The Certificate Registration Number is 9270A-1

FCC- Accredited : Test Firm Registration Number: 463705
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expanded uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95 %.

Test Item	Measurement Frequency Range	K	U(dB)
AC Mains Conducted Emission	0.009kHz ~ 0.15MHz	2	2.66
AC Mains Conducted Emission	0.15MHz ~ 30MHz	2	2.80
Telecom Conducted Emission (Cat 3)	0.15MHz ~ 30MHz	2	2.40
Telecom Conducted Emission (Cat 5)	0.15MHz ~ 30MHz	2	2.58
Radiated Emission	30MHz ~ 1000MHz	2	2.64
Radiated Emission	1000MHz ~ 6000MHz	2	2.40
Radiated Emission	6000MHz ~ 18000MHz	2	2.52
Power Clamp	30MHz ~ 300MHz	2	2.20

Revision History

[illegible]

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	PMA Graphene Multi-function Heating Blanket	
Model Name	PMA-B21	
Additional Model Number(s)	PMA-B20	
Model Difference	All models are identical except fitting.	
Product Description	The EUT is a PMA Graphene Multi-function Heating Blanket.	
	Operating frequency:	Below 15MHz (Declaration by factory)
	Connecting I/O port:	N/A
	Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as a Household Device. More details of EUT technical specifications, please refer to the User's Manual.	
Power Source	DC Voltage	
Power Rating	Input: DC 5V, 2A Output: DC 5V, 2A	

2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


Pretest Mode	Description
Mode 1	Working
Mode 2	Charging

For Radiated Test	
Final Test Mode	Description
Mode 1	Working
Mode 2	Charging

For EMS Test	
Final Test Mode	Description
Mode 1	Working
Mode 2	Charging

2.3 DESCRIPTION OF TEST SETUP

Mode RE: Working

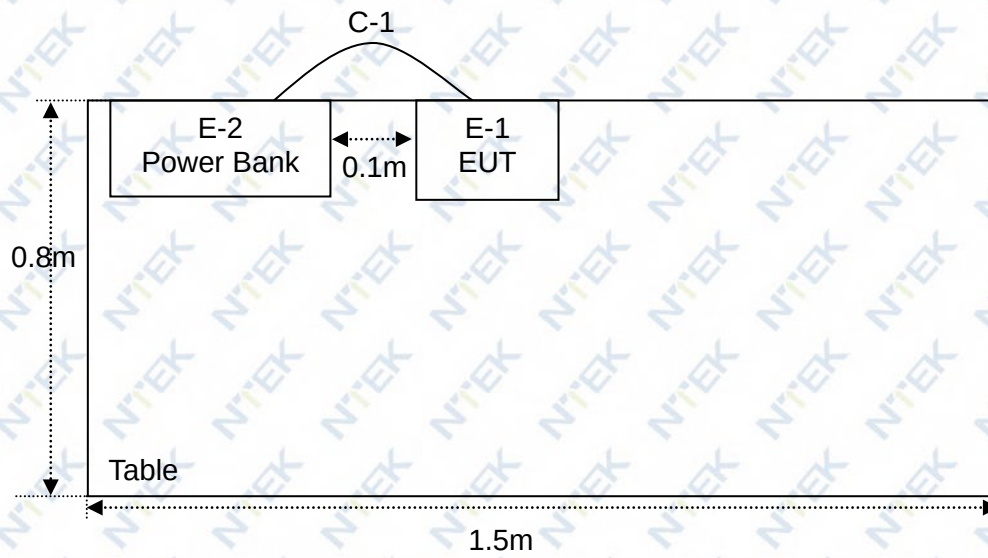

2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Brand	Model/Type No.	Series No.	Note
E-1	PMA Graphene Multi-function Heating Blanket	N/A	PMA-B21	N/A	EUT
E-2	Power Bank	N/A	N/A	N/A	EUT

Item	Shielded Type	Ferrite Core	Length	Note
C-1	NO	NO	20cm	

Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) 'YES' means 'shielded' 'with core'; 'NO' means 'unshielded' 'without core'.

2.5 MEASUREMENT INSTRUMENTS LIST

2.5.1 RADIATED TEST SITE

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	Absorbing Clamp	R&S	MDS-21	100423	Aug. 10, 2017	Aug. 09, 2018	1 year
2	50Ω Switch	Anritsu	MP59B	6200983704	Jun. 06, 2017	Jun. 05, 2018	1 year
3	Test Cable	N/A	P-01	N/A	Jun. 26, 2016	Jun. 25, 2019	3 years
4	Bilog Antenna	TESEQ	CBL6111D	31216	Apr. 09, 2017	Apr. 08, 2018	1 year
5	Test Cable	N/A	R-03	N/A	Jun. 26, 2016	Jun. 25, 2019	3 years
6	Test Cable	N/A	R-01	N/A	Aug. 08, 2016	Aug. 07, 2019	3 years
7	EMI Test Receiver	R&S	ESCI	101160	Jun. 06, 2017	Jun. 05, 2018	1 year
8	Spectrum Analyzer	Agilent	E4440A	MY41000130	Apr. 10, 2017	Apr. 09, 2018	1 year
9	Antenna Mast	SKET	N/A	N/A	N/A	N/A	N/A
10	Antenna Mast	EM	SC100	N/A	Apr. 26, 2017	Apr. 25, 2020	3 years
11	Turn Table	EM	SC100_1	60531	Apr. 26, 2017	Apr. 25, 2020	3 years
12	50Ω Switch	Anritsu	MP59B	6200983705	Jun. 06, 2017	Jun. 05, 2018	1 year
13	Broadband Horn Antenna	EM	EM-AH-10180	2011071402	Apr. 09, 2017	Apr. 08, 2018	1 year
14	Pre-Amplifier	EMC	EMC051835SE	980246	Aug. 07, 2017	Aug. 06, 2018	1 year

2.5.2 ESD

Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until	Calibration period
1	ESD TEST GENERATOR	Lioncel	ESD-203B	ESD203B0150402	Oct. 30, 2017	Oct. 29, 2018	1 year

3. EMC EMISSION TEST

3.1 RADIATED EMISSION MEASUREMENT

3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

FREQUENCY (MHz)	☐ At 10m	☒ At 3m
	dB μ V/m	dB μ /m
30 – 230	30	40
230 – 1000	37	47

3.1.2 LIMITS OF DISTURBANCE POWER MEASUREMENT (Below 1000MHz)

		Household and similar appliances		Tools					
Frequency Range				Rated motor power not exceeding 700 W		Rated motor power above 700 W and not exceeding 1 000 W		Rated motor power above 1 000 W	
(MHz)		dB(pW) Quasi-peak	dB (pW) Average *	dB (pW) Quasi-peak	dB (pW) Average *	dB (pW) Quasi-peak	dB (pW) Average *	dB (pW) Quasi-peak	dB (pW) Average *
30-300		44-55	35-45	44-55	35-45	49-59	39-49	55-65	45-55

* If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

Notes:


- (1) The limit for radiated test was performed according to as following: CISPR 14.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB μ V/m)=20log Emission level (uV/m).

3.1.3 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.4 TEST SETUP

(A) Radiated Emission Test Set-Up Frequency Below 1 GHz.

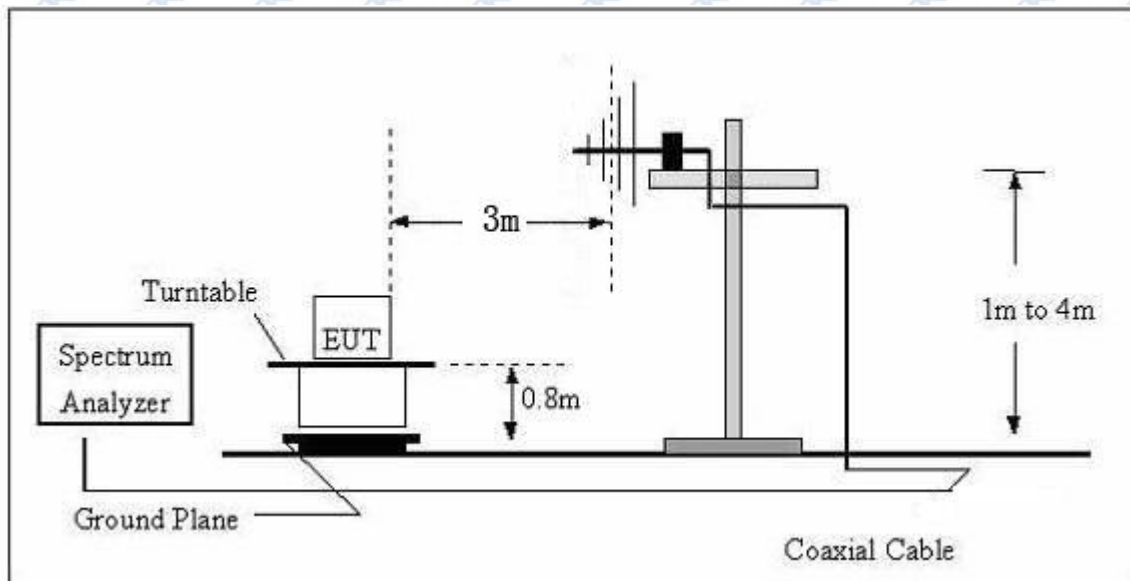

(B) Radiated Emission Test Set-Up Frequency Above 30 MHz

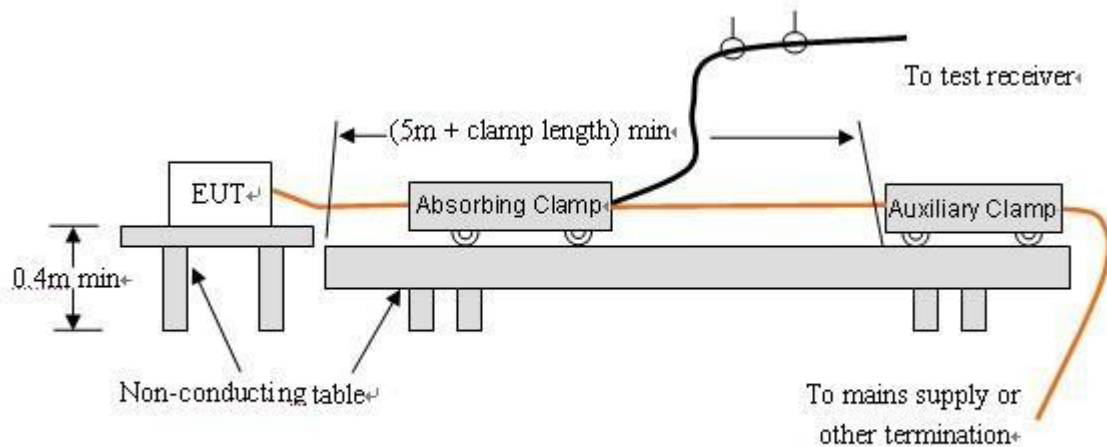


3.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

3.1.6 TEST RESULTS (30MHz ~1000MHz)

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21℃	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(High)	Test Port:	Horizontal
Test Power:	DC 5V powered by Adapter		

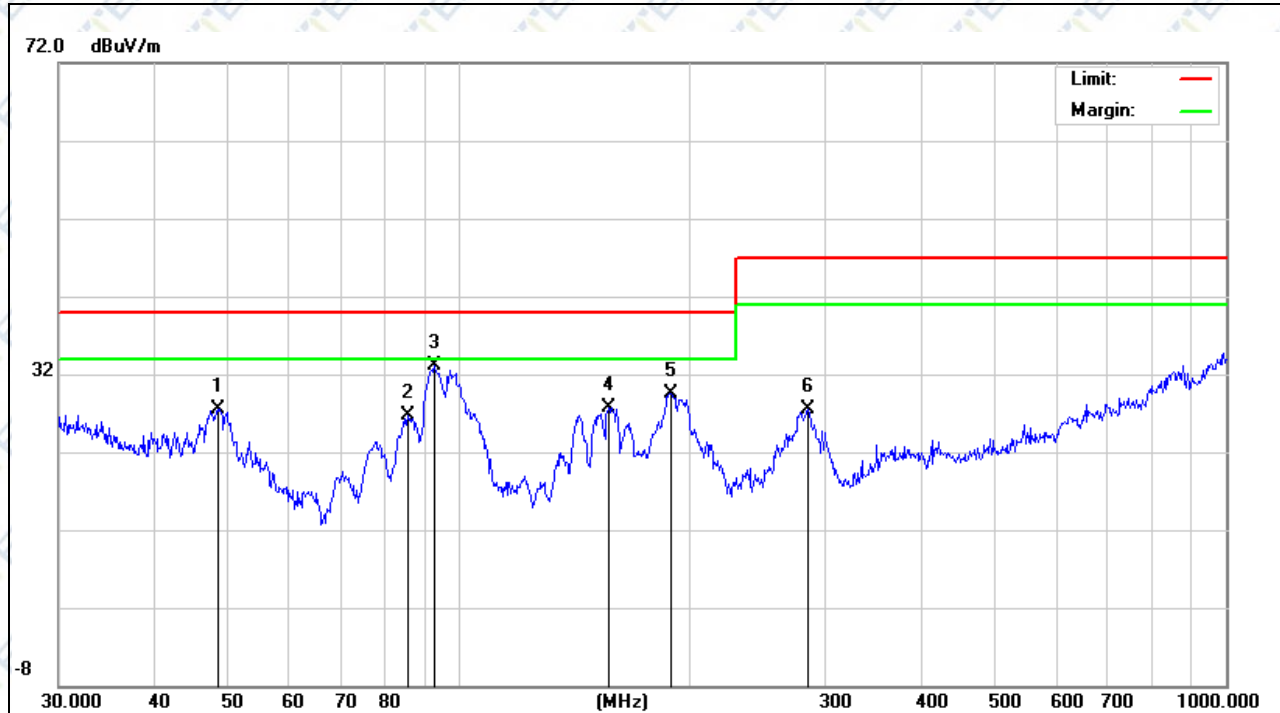


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		48.3318	14.04	13.37	27.41	40.00	-12.59	QP			
2		85.5977	15.44	11.21	26.65	40.00	-13.35	QP			
3	*	92.7871	21.07	11.97	33.04	40.00	-6.96	QP			
4		156.4576	16.33	11.46	27.79	40.00	-12.21	QP			
5		189.0742	16.76	12.72	29.48	40.00	-10.52	QP			
6		284.9766	13.41	14.08	27.49	47.00	-19.51	QP			

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21℃	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(High)	Test Port:	Vertical
Test Power:	DC 5V powered by Adapter		

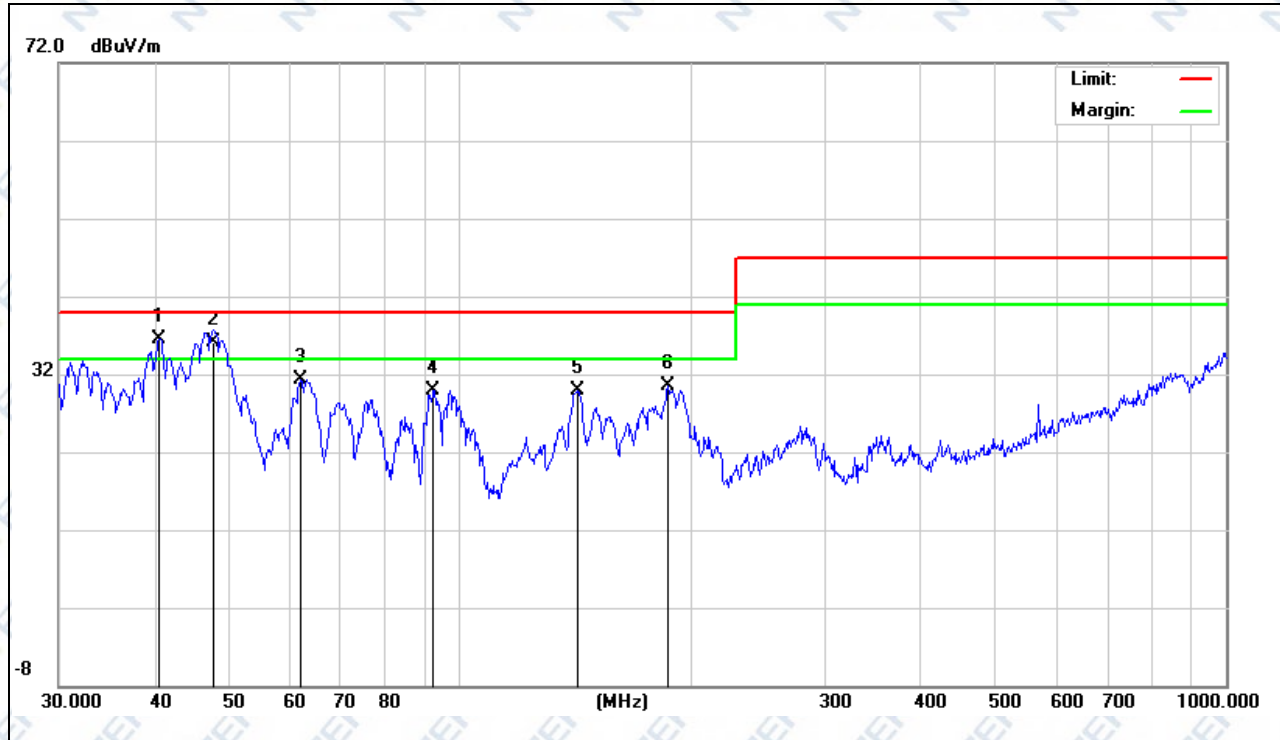


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	*	40.5591	20.53	16.06	36.59	40.00	-3.41	QP		
2	!	47.8260	22.85	13.35	36.20	40.00	-3.80	QP		
3		61.9951	22.33	9.06	31.39	40.00	-8.61	QP		
4		92.4624	17.98	11.94	29.92	40.00	-10.08	QP		
5		142.3243	18.57	11.36	29.93	40.00	-10.07	QP		
6		187.0958	17.75	12.71	30.46	40.00	-9.54	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21℃	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(Middle)	Test Port:	Horizontal
Test Power:	DC 5V powered by Adapter		

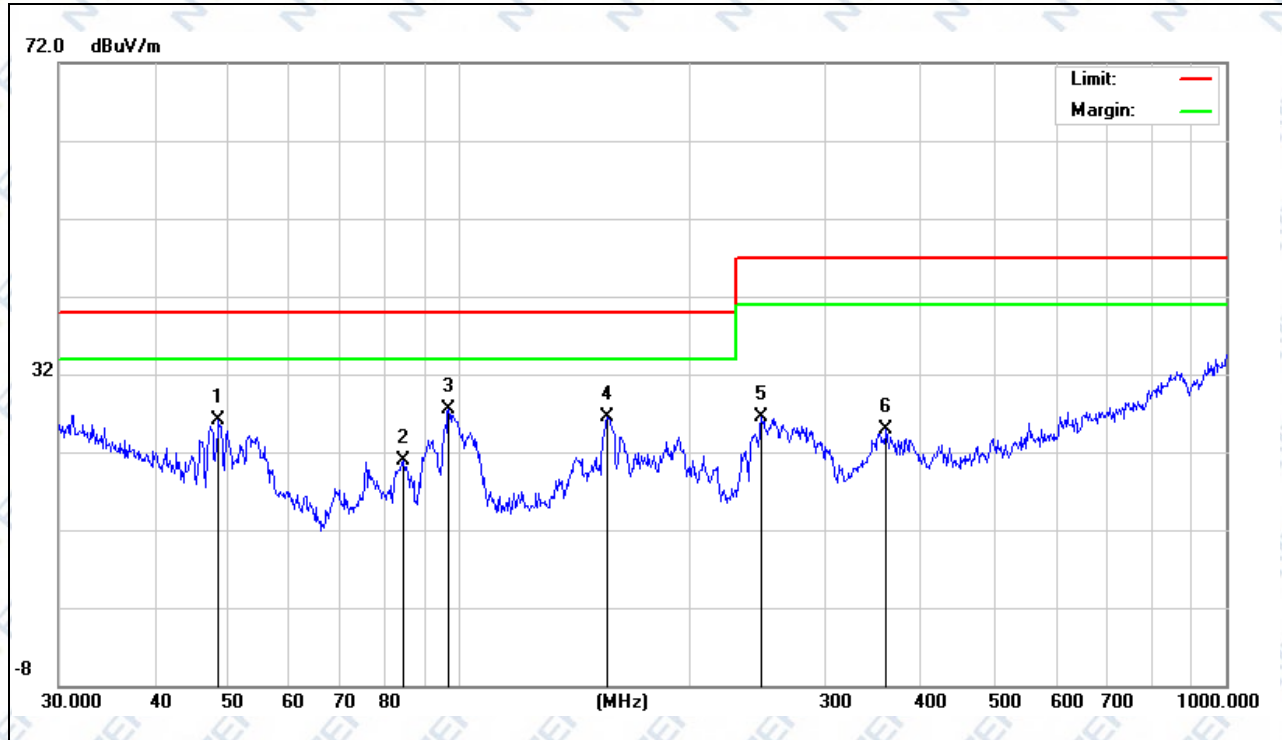


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		48.5016	12.72	13.37	26.09	40.00	-13.91	QP		
2		84.4054	9.67	11.27	20.94	40.00	-19.06	QP		
3	*	96.7749	16.16	11.35	27.51	40.00	-12.49	QP		
4		155.9101	15.18	11.33	26.51	40.00	-13.49	QP		
5		247.6819	14.42	12.04	26.46	47.00	-20.54	QP		
6		360.4476	10.36	14.47	24.83	47.00	-22.17	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21℃	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(Middle)	Test Port:	Vertical
Test Power:	DC 5V powered by Adapter		

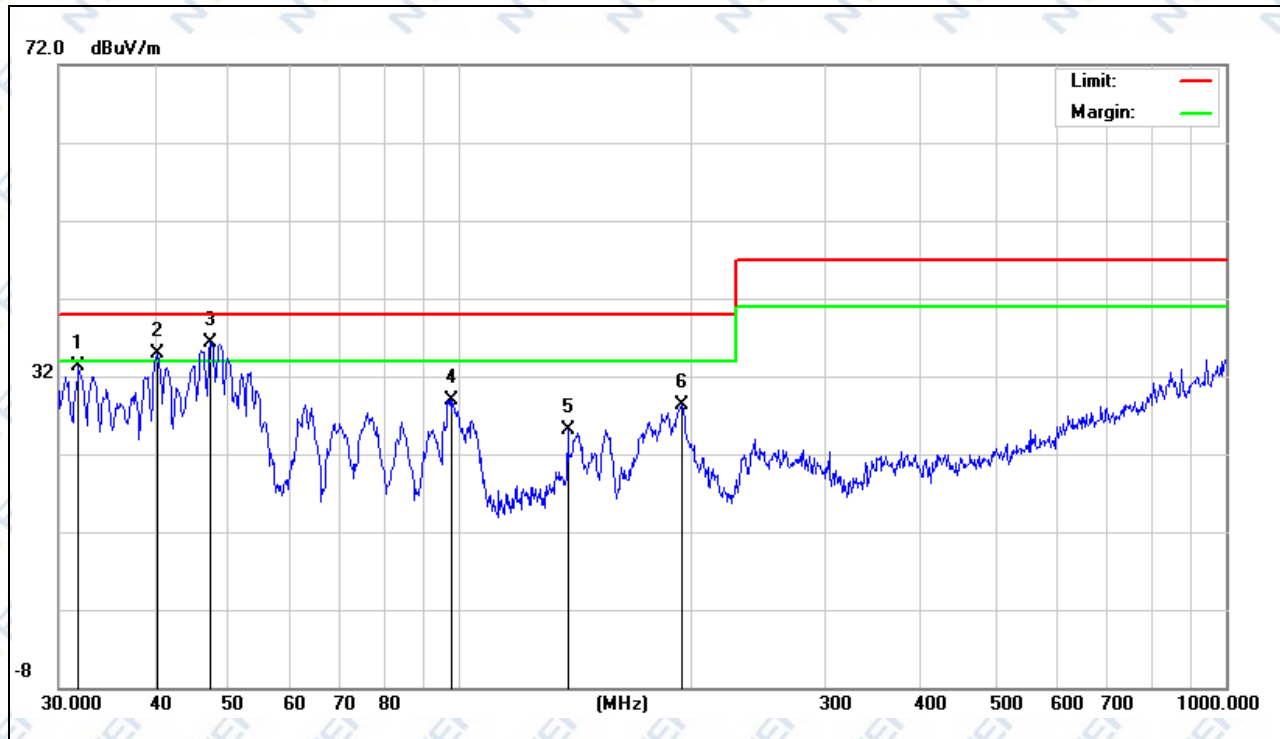


No.	Mk.	Freq.	Reading Level	Correct Factor	Measure-ment	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.8427	12.87	20.41	33.28	40.00	-6.72	QP		
2	I	40.4172	18.89	16.11	35.00	40.00	-5.00	QP		
3	*	47.3255	23.14	13.26	36.40	40.00	-3.60	QP		
4		97.7983	18.52	10.42	28.94	40.00	-11.06	QP		
5		138.3873	13.72	11.46	25.18	40.00	-14.82	QP		
6		195.1365	14.49	13.74	28.23	40.00	-11.77	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21°C	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(Low)	Test Port:	Horizontal
Test Power:	DC 5V powered by Adapter		

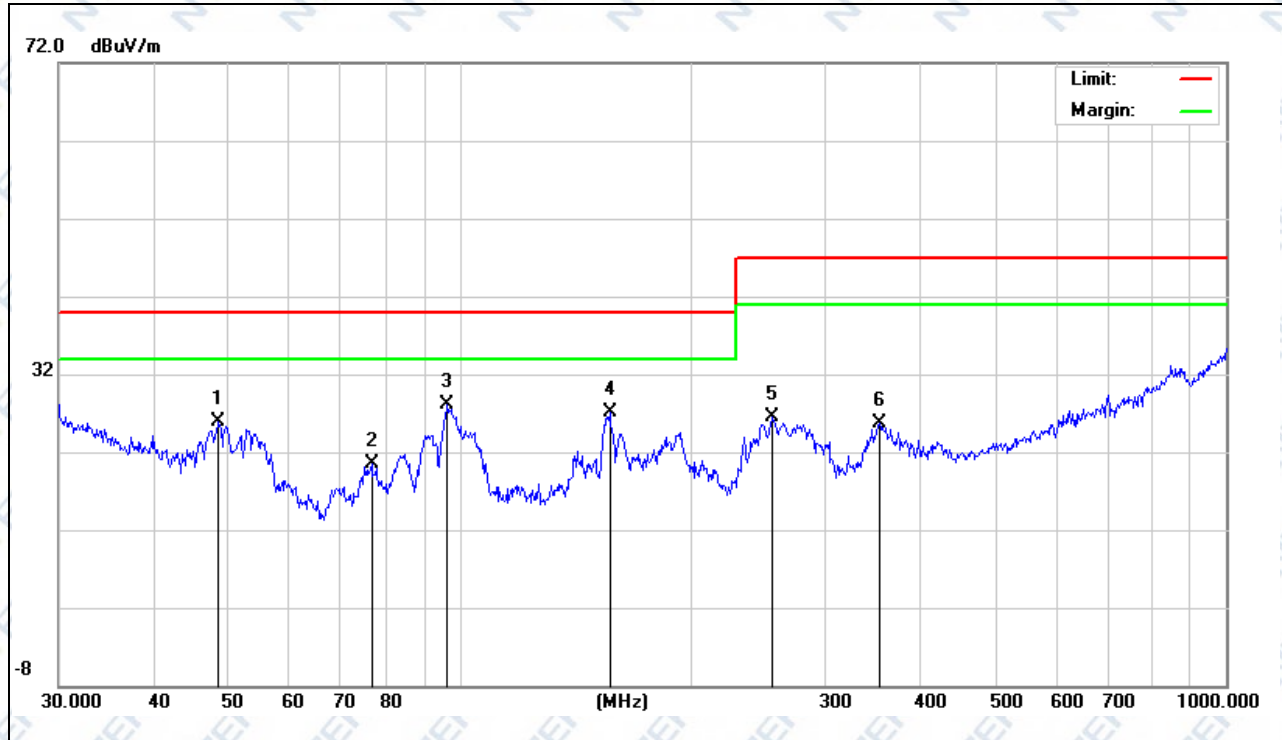


No.	Mk.	Freq.	Reading	Correct	Measure-	Limit	Over	Antenna	Table	
		MHz	Level	Factor	ment			Height	Degree	
			dBuV	dB	dBuV/m	dBuV/m	dB	Detector	cm	degree
1		48.5016	12.55	13.37	25.92	40.00	-14.08	QP		
2		76.7807	9.01	11.56	20.57	40.00	-19.43	QP		
3	*	96.4362	16.37	11.67	28.04	40.00	-11.96	QP		
4		157.0074	15.54	11.59	27.13	40.00	-12.87	QP		
5		255.6231	13.87	12.54	26.41	47.00	-20.59	QP		
6		352.9433	11.35	14.39	25.74	47.00	-21.26	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21°C	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(Low)	Test Port:	Vertical
Test Power:	DC 5V powered by Adapter		

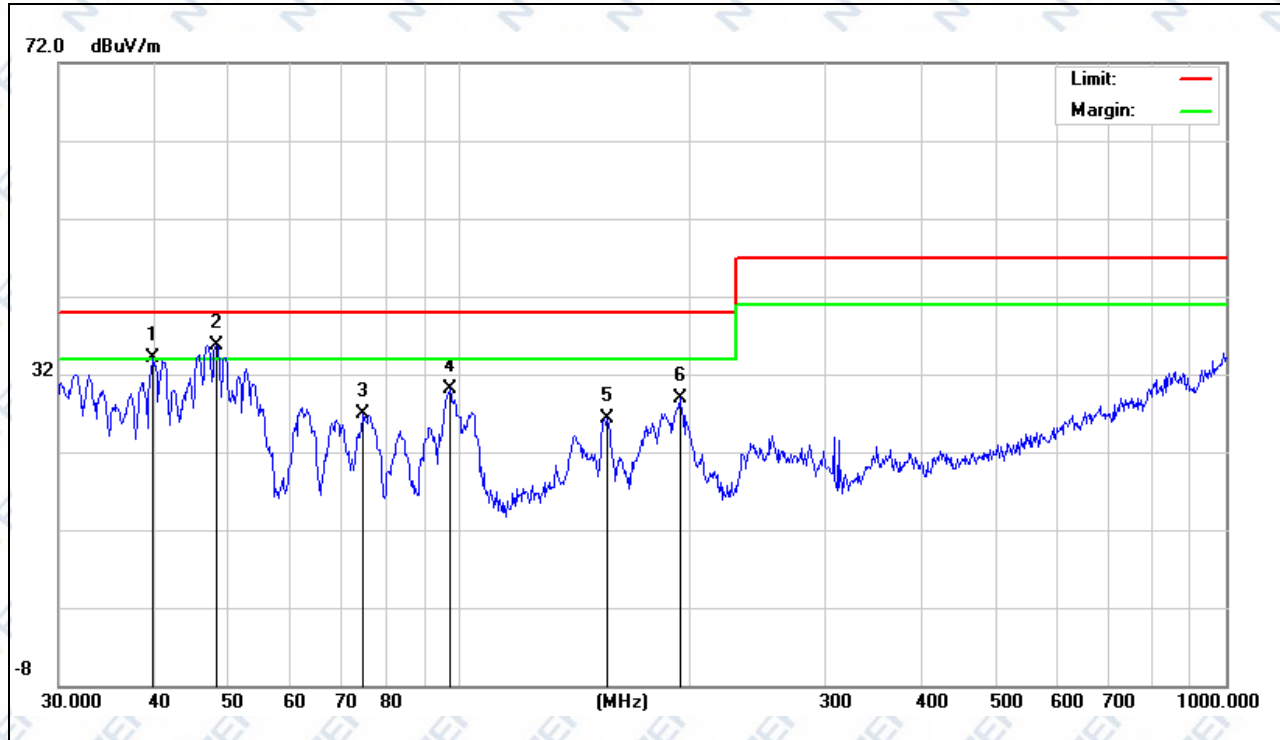


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1	I	39.8541	17.66	16.36	34.02	40.00	-5.98	QP		
2	*	48.1626	22.28	13.38	35.66	40.00	-4.34	QP		
3		74.9191	15.77	11.12	26.89	40.00	-13.11	QP		
4		97.1148	19.01	11.04	30.05	40.00	-9.95	QP		
5		155.9100	14.97	11.33	26.30	40.00	-13.70	QP		
6		193.7728	15.49	13.49	28.98	40.00	-11.02	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21℃	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(High)	Test Port:	Horizontal
Test Power:	DC 5V powered by Power Bank		

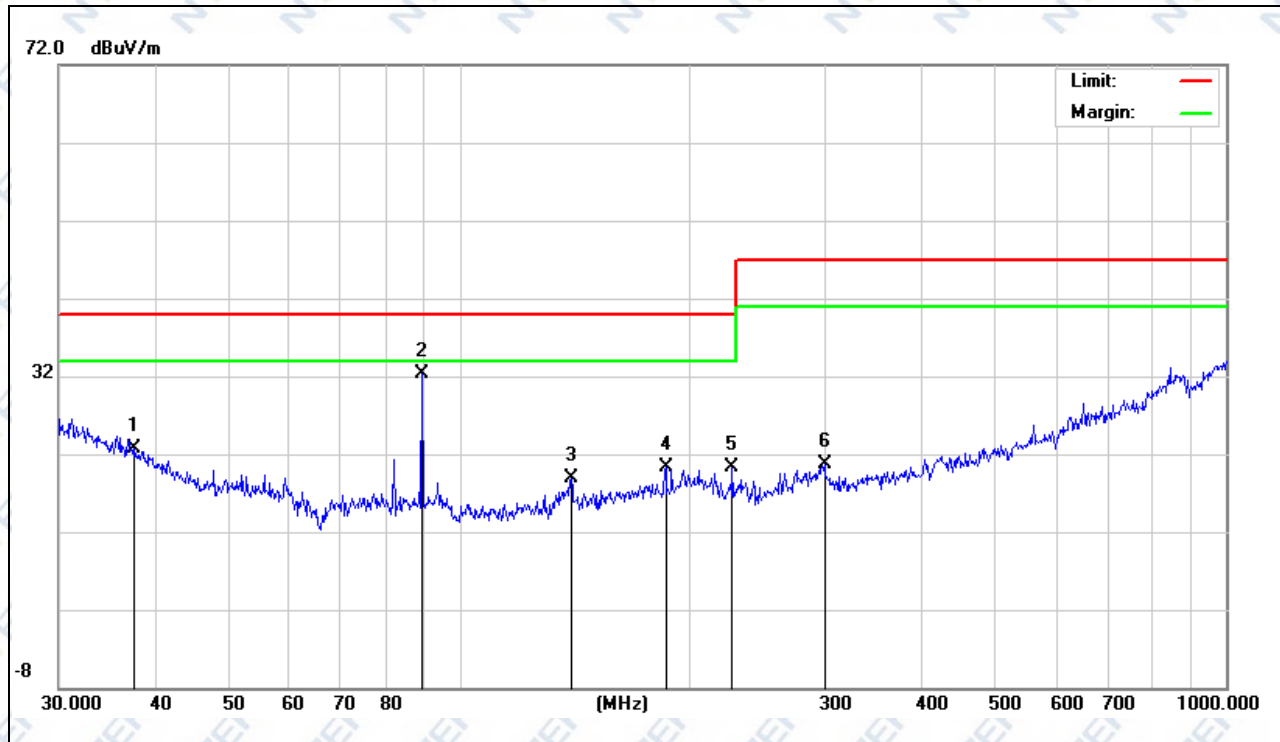


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		37.6798	5.03	17.64	22.67	40.00	-17.33	QP		
2	*	89.2764	20.56	11.77	32.33	40.00	-7.67	QP		
3		139.8507	7.55	11.36	18.91	40.00	-21.09	QP		
4		185.7881	7.53	12.70	20.23	40.00	-19.77	QP		
5		226.8936	8.17	12.15	20.32	40.00	-19.68	QP		
6		299.3158	6.00	14.71	20.71	47.00	-26.29	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21°C	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(High)	Test Port:	Vertical
Test Power:	DC 5V powered by Power Bank		

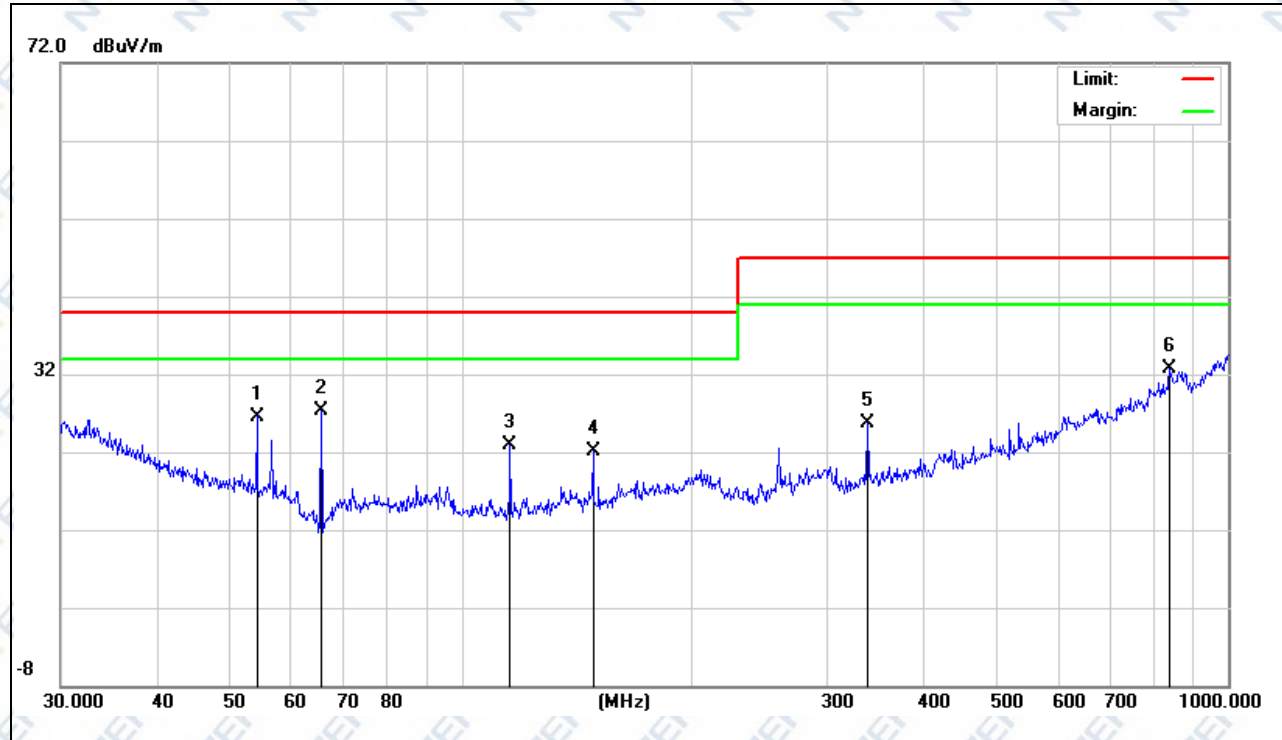


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		54.0711	14.31	12.29	26.60	40.00	-13.40	QP		
2	*	65.5726	19.47	7.76	27.23	40.00	-12.77	QP		
3		115.7256	12.80	10.14	22.94	40.00	-17.06	QP		
4		148.4410	10.77	11.30	22.07	40.00	-17.93	QP		
5		338.4001	11.49	14.18	25.67	47.00	-21.33	QP		
6		839.1817	7.14	25.58	32.72	47.00	-14.28	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21℃	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(Middle)	Test Port:	Horizontal
Test Power:	DC 5V powered by Power Bank		

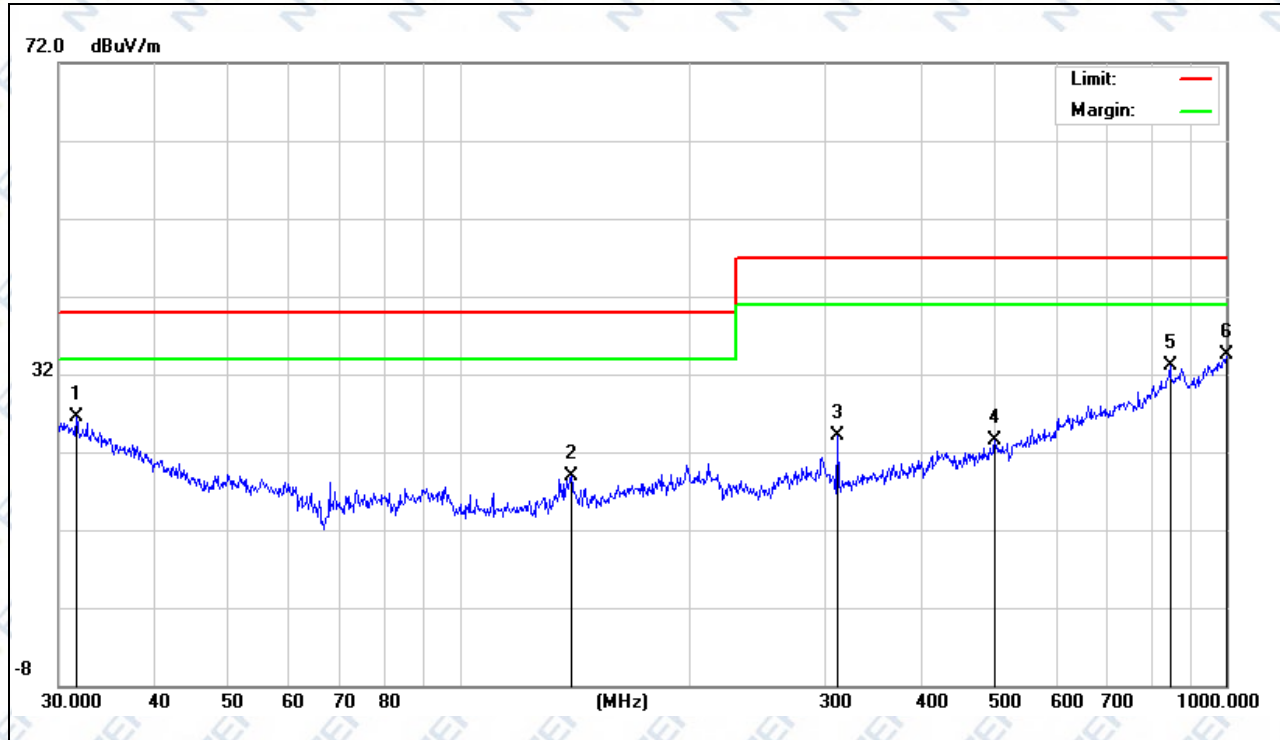


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		31.6202	5.99	20.50	26.49	40.00	-13.51	QP		
2		139.8506	7.59	11.36	18.95	40.00	-21.05	QP		
3		311.0867	10.80	13.27	24.07	47.00	-22.93	QP		
4		499.4245	5.78	17.69	23.47	47.00	-23.53	QP		
5		845.0878	7.44	25.68	33.12	47.00	-13.88	QP		
6	*	1000.000	6.23	28.25	34.48	47.00	-12.52	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21℃	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(Middle)	Test Port:	Vertical
Test Power:	DC 5V powered by Power Bank		

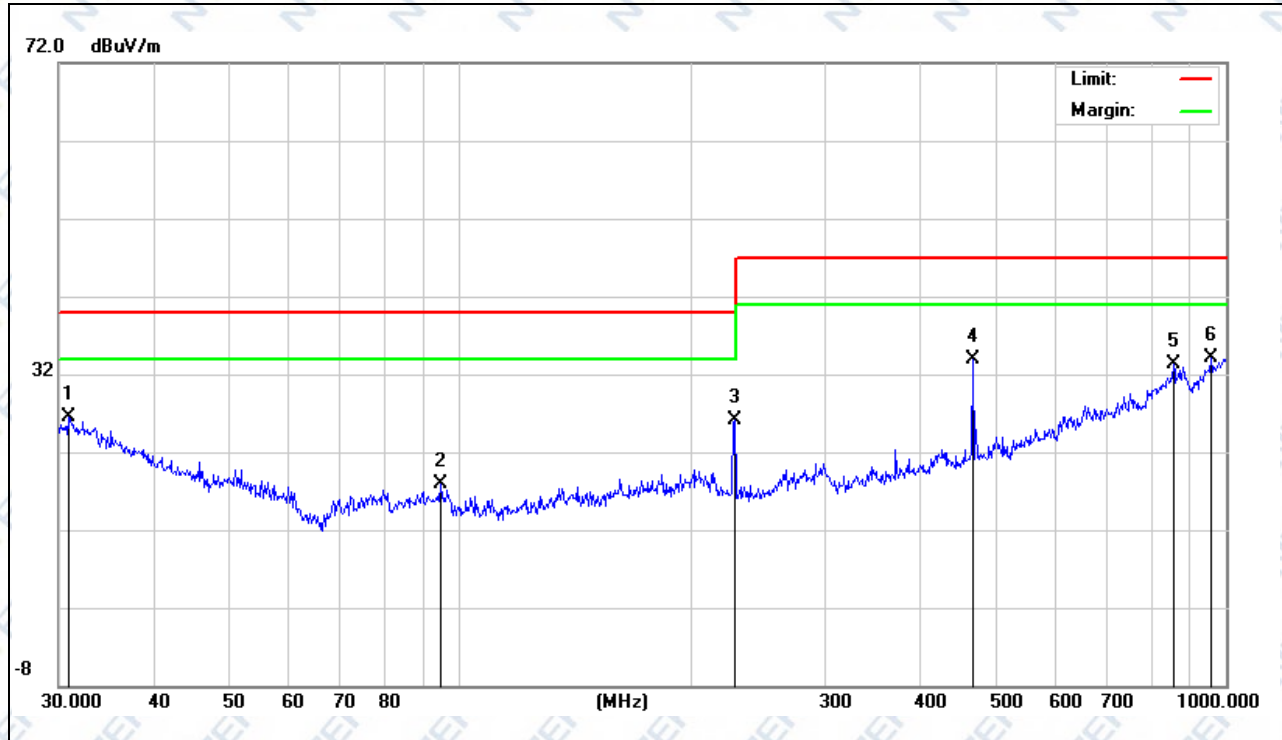


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.8535	5.58	20.84	26.42	40.00	-13.58	QP		
2		94.4282	5.83	12.06	17.89	40.00	-22.11	QP		
3		228.4904	14.05	12.10	26.15	40.00	-13.85	QP		
4		467.2349	17.38	16.58	33.96	47.00	-13.04	QP		
5		854.0247	7.49	25.78	33.27	47.00	-13.73	QP		
6	*	955.4379	7.34	26.83	34.17	47.00	-12.83	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21℃	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(Low)	Test Port:	Horizontal
Test Power:	DC 5V powered by Power Bank		

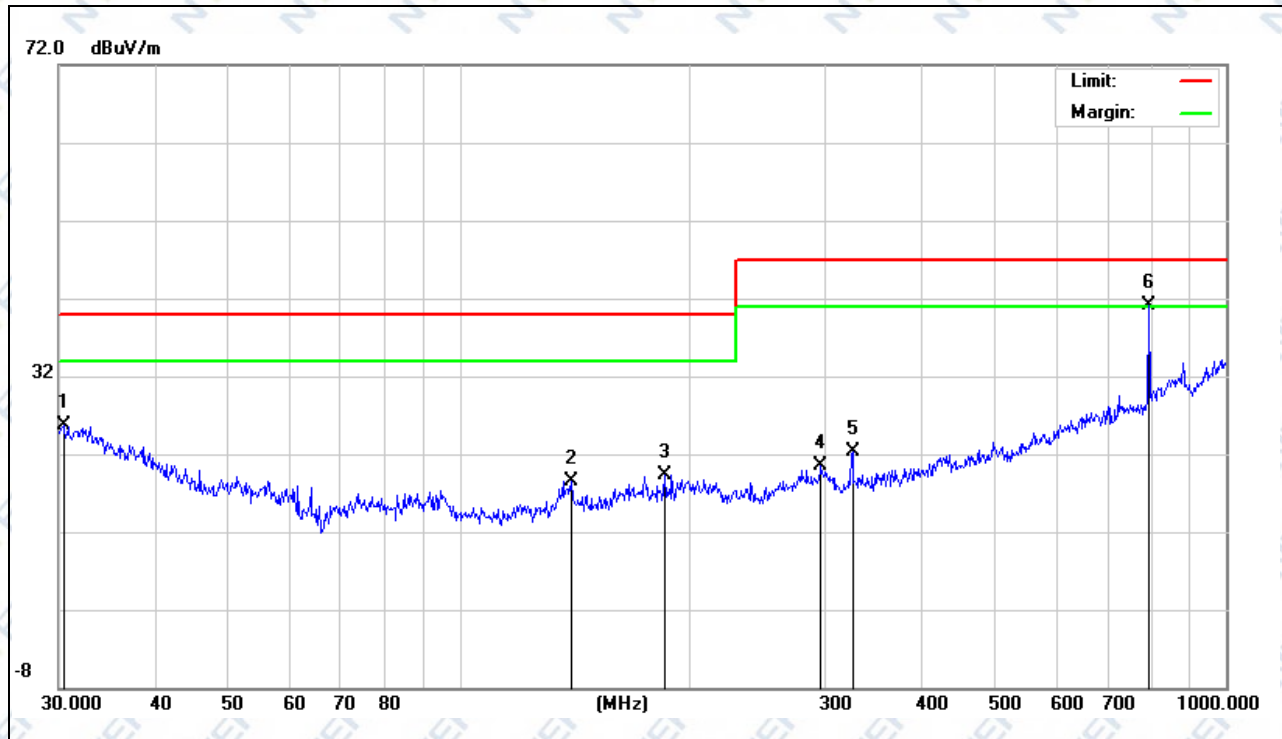


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		30.4238	4.75	21.02	25.77	40.00	-14.23	QP		
2		139.8506	7.06	11.36	18.42	40.00	-21.58	QP		
3		185.1379	6.67	12.70	19.37	40.00	-20.63	QP		
4		296.1836	5.80	14.63	20.43	47.00	-26.57	QP		
5		325.5958	8.55	13.68	22.23	47.00	-24.77	QP		
6	*	793.3960	17.19	23.82	41.01	47.00	-5.99	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21℃	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Working(Low)	Test Port:	Vertical
Test Power:	DC 5V powered by Power Bank		

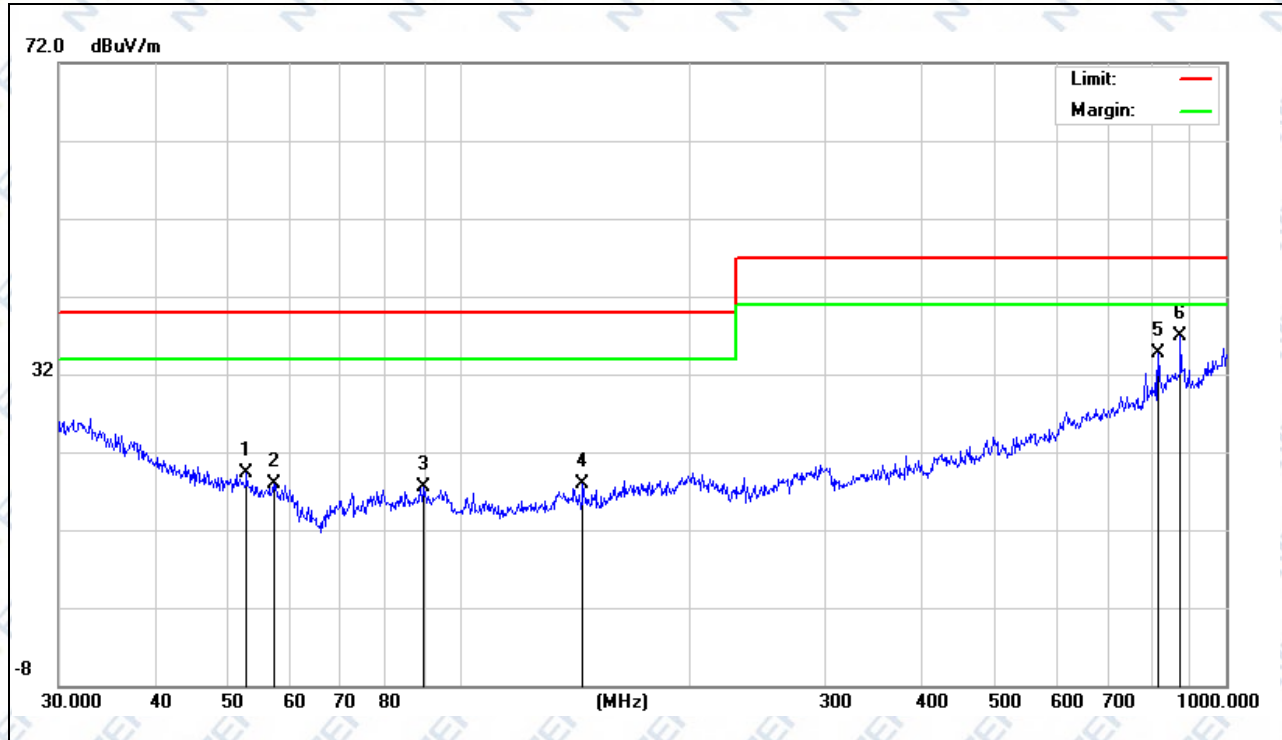


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Over	Antenna Height	Table Degree	
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	cm	degree	Comment
1		52.7599	6.33	12.89	19.22	40.00	-20.78	QP		
2		57.1914	5.93	11.88	17.81	40.00	-22.19	QP		
3		89.5899	5.79	11.77	17.56	40.00	-22.44	QP		
4		144.8418	6.51	11.35	17.86	40.00	-22.14	QP		
5		815.9678	10.27	24.37	34.64	47.00	-12.36	QP		
6	*	872.1832	10.94	25.93	36.87	47.00	-10.13	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21°C	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Charging	Test Port:	Horizontal
Test Power:	DC 5V powered by Adapter		

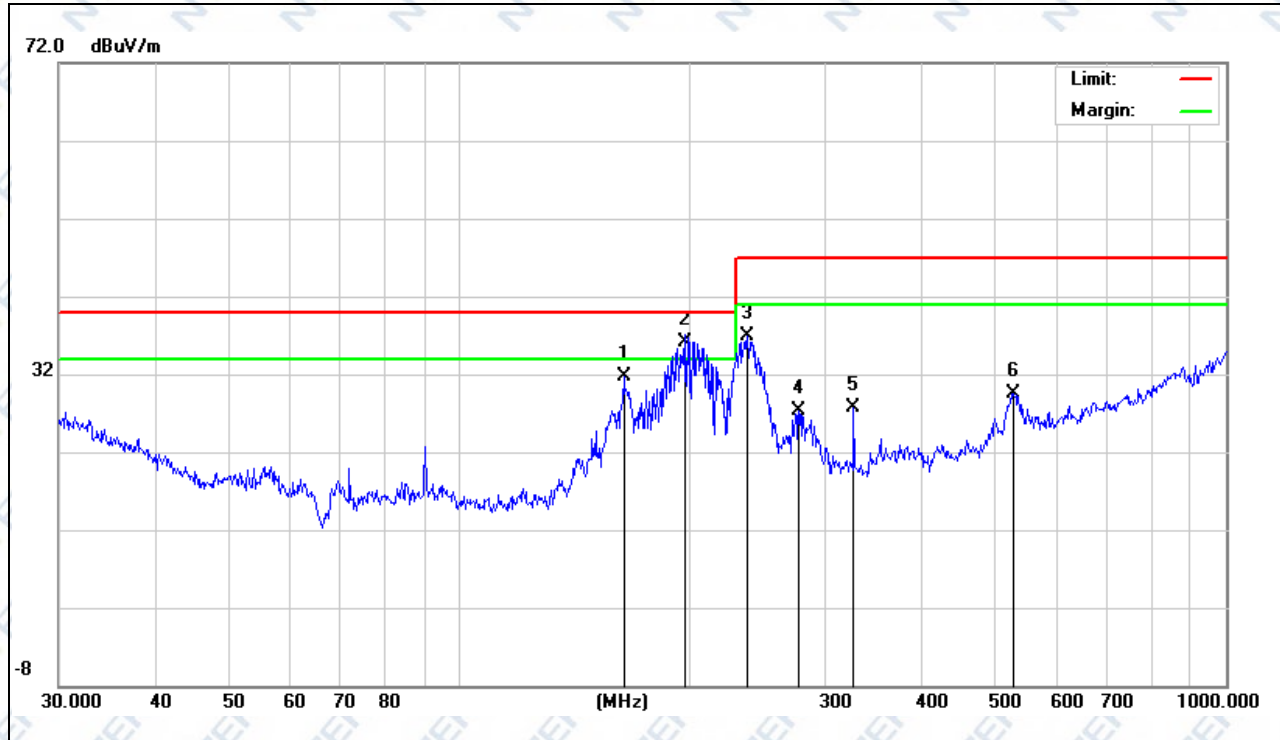

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Detector	Antenna Height cm	Table Degree degree	Comment
1		163.7549	19.21	12.42	31.63	40.00	-8.37	QP			
2	*	197.2001	22.35	13.75	36.10	40.00	-3.90	QP			
3		237.4760	24.88	12.01	36.89	47.00	-10.11	QP			
4		277.0935	13.20	14.03	27.23	47.00	-19.77	QP			
5		326.7395	14.03	13.74	27.77	47.00	-19.23	QP			
6		528.2458	11.89	17.66	29.55	47.00	-17.45	QP			

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	21℃	Relative Humidity:	34%
Pressure:	1010hPa	Test Date :	2018-01-15
Test Mode:	Charging	Test Port:	Vertical
Test Power:	DC 5V powered by Adapter		



No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Over dB	Antenna Height cm	Table Degree degree	Comment
1		49.1865	17.96	13.35	31.31	40.00	-8.69	QP		
2	!	56.3948	22.43	12.10	34.53	40.00	-5.47	QP		
3		62.2128	23.61	9.03	32.64	40.00	-7.36	QP		
4		166.6512	20.93	12.53	33.46	40.00	-6.54	QP		
5	*	198.5880	23.05	13.75	36.80	40.00	-3.20	QP		
6		233.3487	23.89	12.05	35.94	47.00	-11.06	QP		

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

4. EMC IMMUNITY TEST

4.1 STANDARD COMPLIANCE/ SEVERITY LEVEL/ CRITERIA

Tests Standard No.	TEST SPECIFICATION	Test Mode Test Ports	Perform. Criteria
1. ESD IEC/EN 61000-4-2	8kV air discharge 4kV contact discharge	Direct Mode	B
	4kV HCP discharge 4kV VCP discharge	Indirect Mode	B

4.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55014-2** standard, the general performance criteria as following:

Criterion A	The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.
Criterion B	After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.
Criterion C	Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

4.4 ESD TESTING

4.4.1 TEST SPECIFICATION


Basic Standard:	IEC/EN 61000-4-2
Discharge Impedance:	330ohm / 150pF
Required Performance:	B
Discharge Voltage:	Air Discharge:2kV/4kV/8kV (Direct) Contact Discharge:2kV/4kV (Direct/Indirect)
Polarity:	Positive & Negative
Number of Discharge:	Air Discharge: min. 20 times at each test point Contact Discharge: min. 20 at each test point
Discharge Mode:	Single Discharge
Discharge Period:	1 second minimum

4.4.2 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. Contact discharge was applied to conductive surfaces and coupling planes of the EUT.
During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second. The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges.
If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.
Vertical Coupling Plane (VCP):
The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.
The four faces of the EUT will be performed with electrostatic discharge.
Horizontal Coupling Plane (HCP):
The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.
The four faces of the EUT will be performed with electrostatic discharge.
- b. Air discharges at insulation surfaces of the EUT.
It was at least ten single discharges with positive and negative at the same selected point.

4.4.3 TEST SETUP

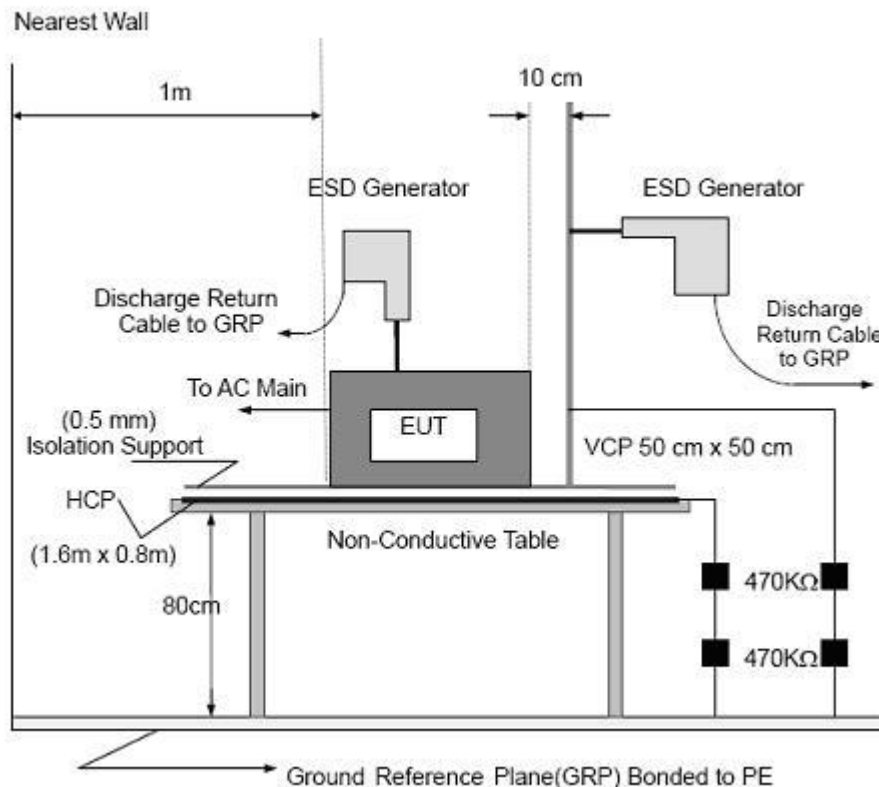

Note:

TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

4.4.4 TEST RESULTS

EUT:	PMA Graphene Multi-function Heating Blanket	Model Name:	PMA-B21
Temperature:	19.4℃	Relative Humidity:	37%
Pressure:	1010hPa	Test Date :	2018-01-16
Test Mode:	Working/ Charging		
Test Power:	DC 5V powered by Power Bank/ DC 5V powered by Adapter		

Mode	Contact Discharge (Indirect)							Criterion	Result		
Test level(kV)	Test Point	2		4		6					
Test Location		+	-	+	-	+	-				
HCP	Front	P	P	P	P			B	Complies		
	Rear	P	P	P	P						
	Left	P	P	P	P						
	Right	P	P	P	P						
VCP	Front	P	P	P	P						
	Rear	P	P	P	P						
	Left	P	P	P	P						
	Right	P	P	P	P						

Mode	Air Discharge								Contact Discharge								Criterion	Result
Test level(kV)	2		4		8		15		2		4		6		8			
Test Location	+	-	+	-	+	-	+	-	+	-	+	-	+	-	+	-		
Gap	P	P	P	P	P	P											B	Complies
Button	P	P	P	P	P	P												
LED	P	P	P	P	P	P												
Mirco USB Port									P	P	P	P						
USB Port									P	P	P	P						


Note:

- 1) +/- denotes the Positive/Negative polarity of the output voltage.
- 2) Test location(s) in which discharge (Air and contact discharge) to be applied illustrated by photos shown in next page(s)
- 3) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.
- 4) Criteria A: Normal performance within limits specified by the manufacturer, requestor or purchaser.
- 5) Criteria B: Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the EUT recovers its normal performance, without operator intervention.
- 6) Criteria C: Temporary loss of function or degradation of performance, the correction of which requires operator intervention.

7) Criteria D: Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.

5. EUT TEST PHOTO

Radiated Measurement Photos

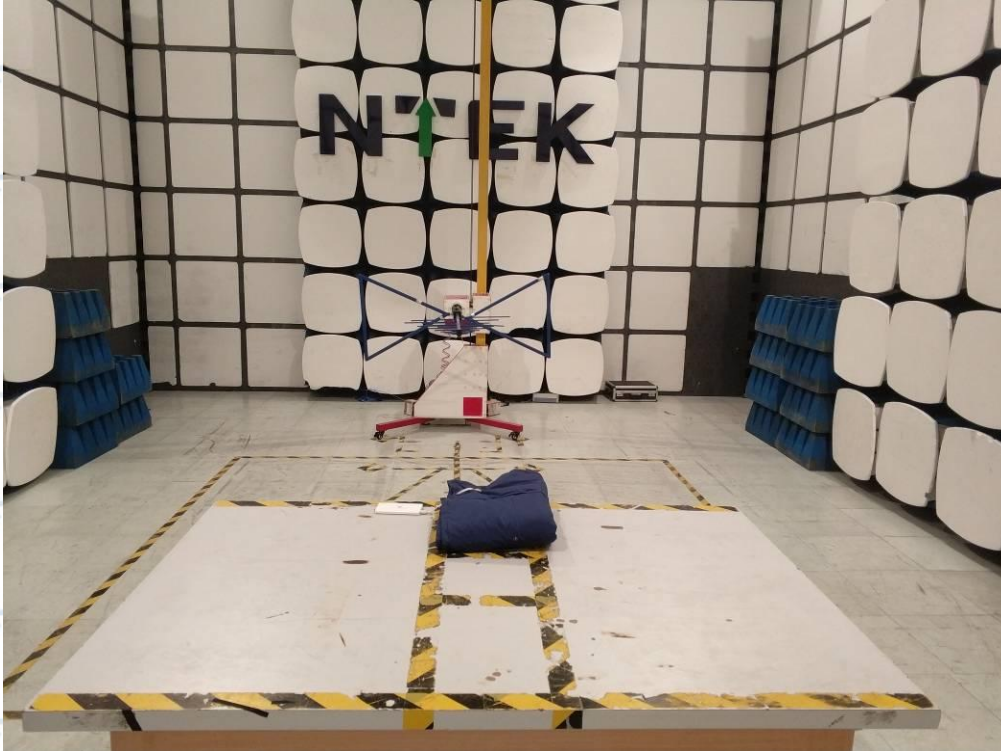

ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1



Photo 2

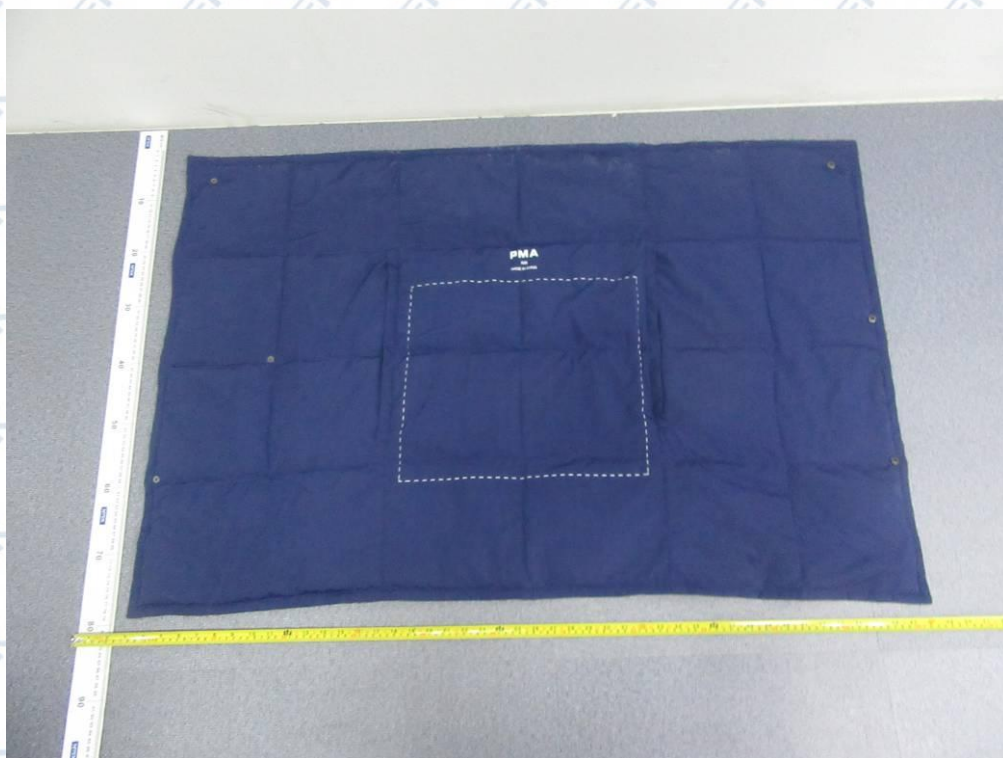


Photo 3

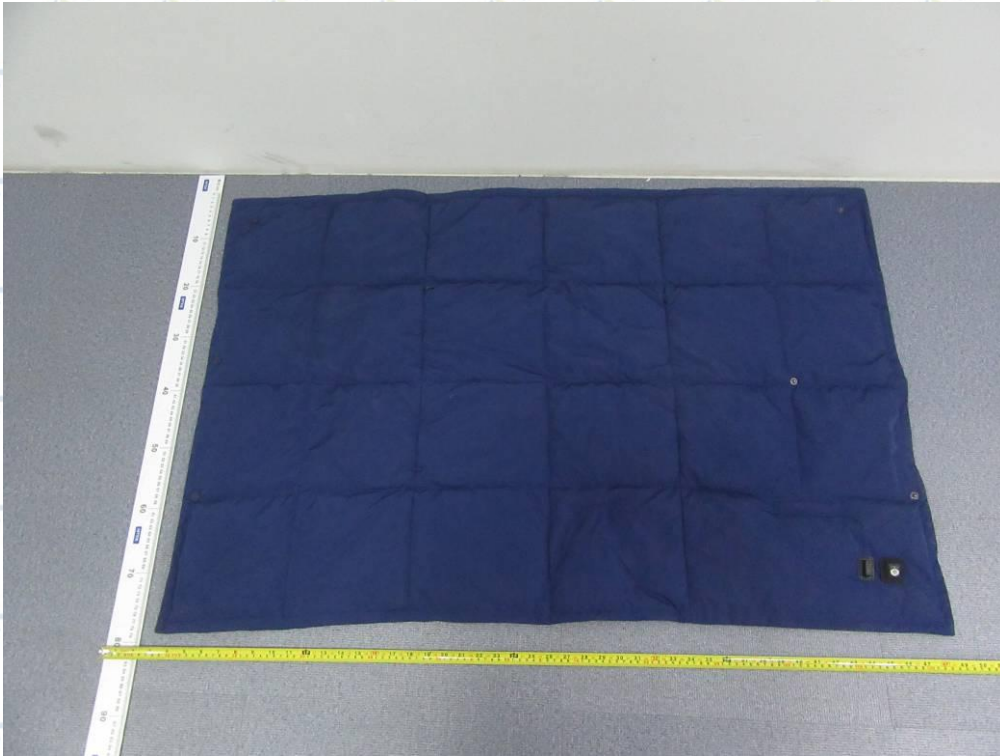


Photo 4



Photo 5



Photo 6

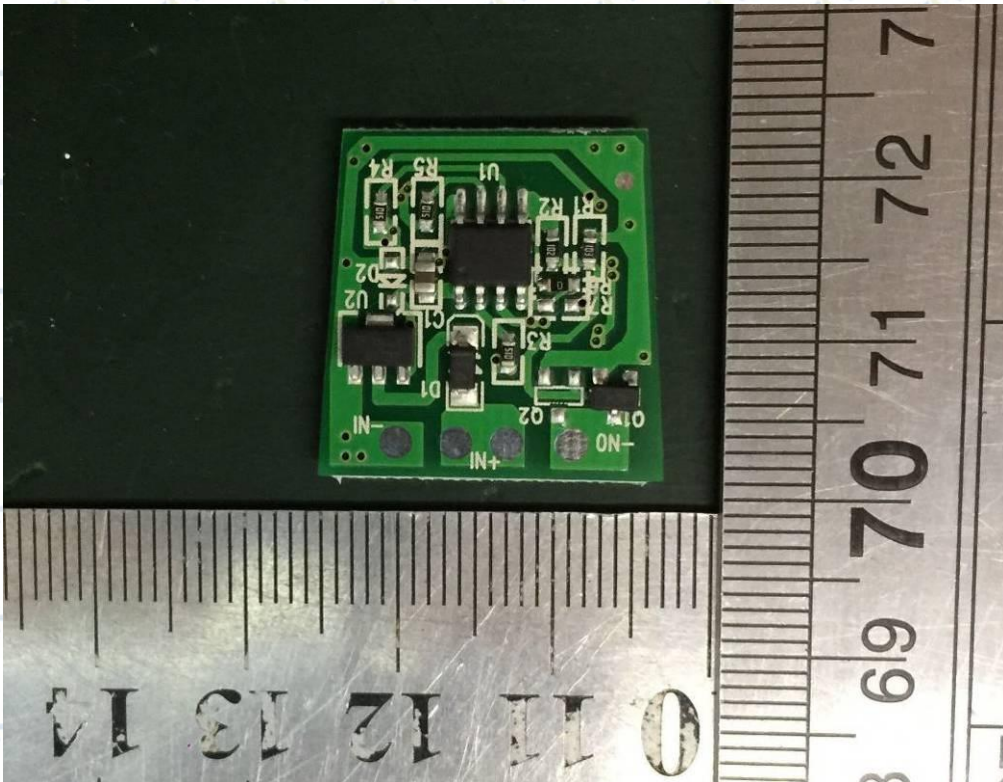


Photo 7

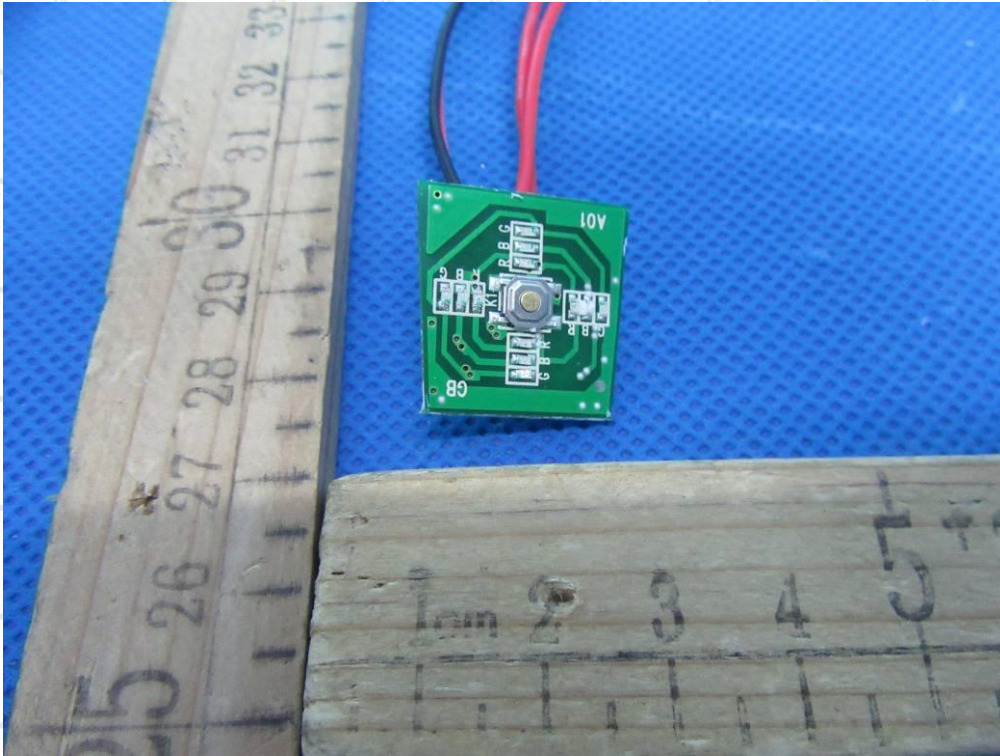


Photo 8



Photo 9



Photo 10



Photo 11



Photo 12



Photo 13

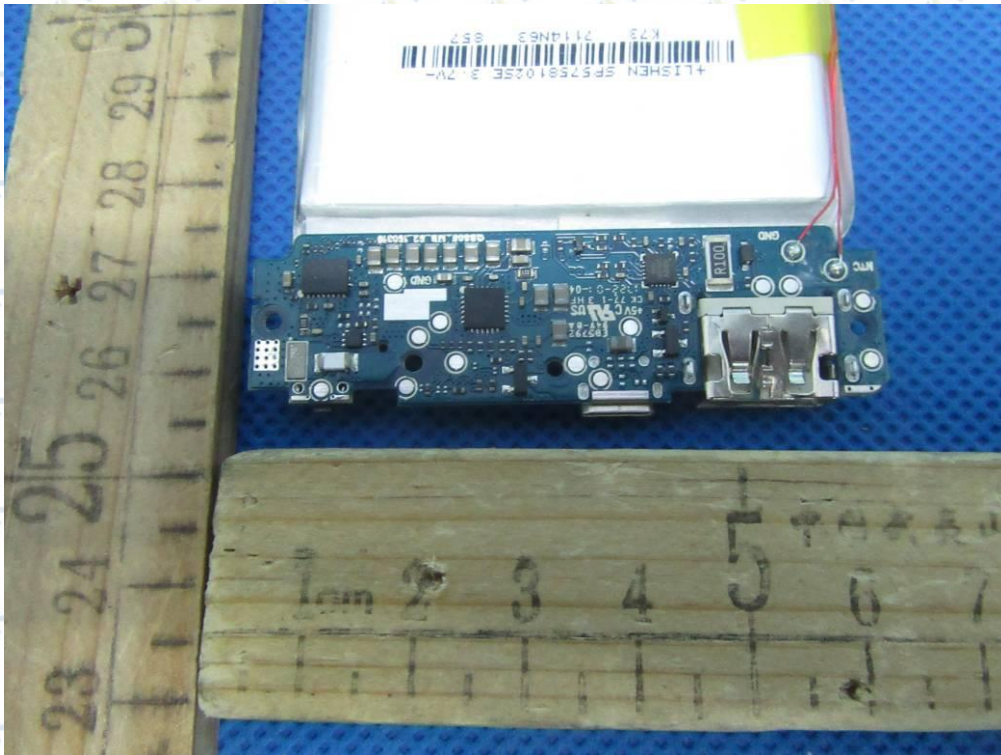


Photo 14

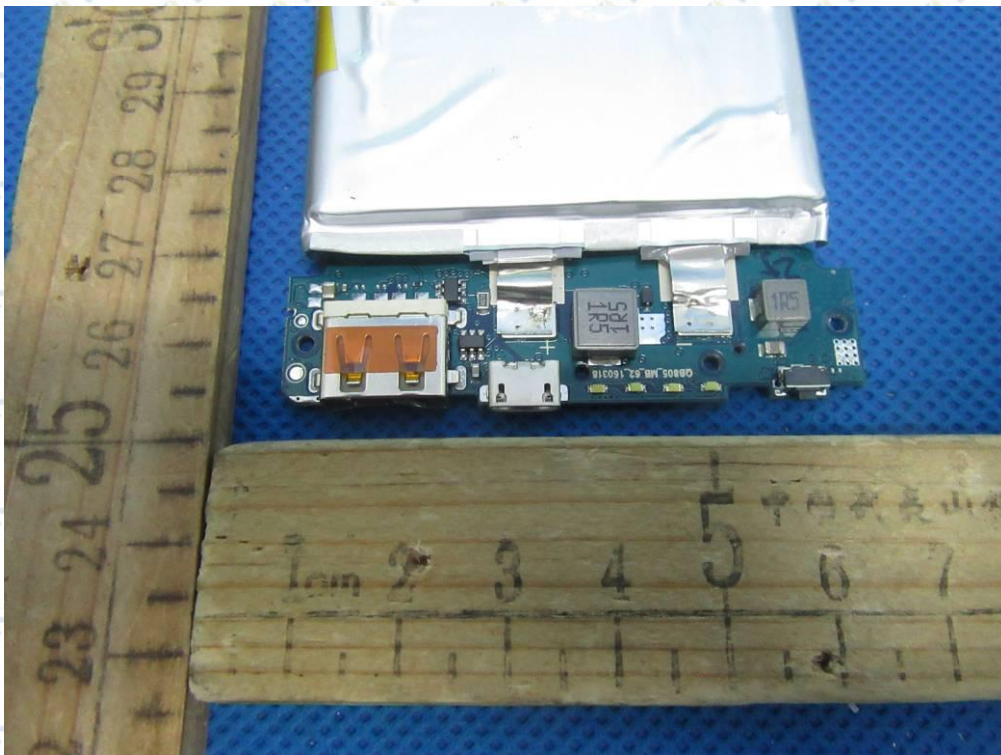


Photo 15



Photo 16

