

# CE EMC Test Report



(Declaration of Conformity)

For  
Electromagnetic compatibility  
Of

**Product:** Graphene intelligent physiotherapy belt

**Trade Mark:** N/A

**Model Number:** PMA-A11

**Prepared for**

Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.

No.16 Building International E-commerce Industrial Estate, No.1201 HuGuang East Rd,  
Shushan District, Hefei city, Anhui, China

**Prepared by**

Shenzhen NTEK Testing Technology Co., Ltd.

1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an  
District, Shenzhen 518126 P.R. China

Tel.: +86-755-6115 6588 Fax.: +86-755-6115 6599

Website: <http://www.ntek.org.cn>

**TEST RESULT CERTIFICATION**

**Applicant's Name** ..... : Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.  
**Address** ..... : No.16 Building International E-commerce Industrial Estate, No.1201  
HuGuang East Rd, Shushan District, Hefei city, Anhui, China  
**Manufacturer's Name** .. : Anhui Aerospace & PMA Anti-radiation Technology Co., Ltd.  
**Address** ..... : No.16 Building International E-commerce Industrial Estate, No.1201  
HuGuang East Rd, Shushan District, Hefei city, Anhui, China

**Product description**

**Product name** ..... : Graphene intelligent physiotherapy belt  
**Model and/or type reference** ..... : PMA-A11

**Standards** ..... : EN 55014-1: 2006+A1: 2009+A2: 2011  
EN 55014-2: 2015

This report shall not be reproduced except in full, without the written approval of NTEK, this document may be altered or revised by NTEK, personal only, and shall be noted in the revision of the document.

**Date of Test** .....

**Date (s) of performance of tests** ..... : 20 Oct. 2017~26 Oct. 2017

**Date of Issue** ..... : 26 Oct. 2017

**Test Result** ..... : **Pass**

**Testing Engineer** :

*Estelle Chen*

(Estelle Chen)

**Technical Manager** :

*Sky Zhang*

(Sky Zhang)

**Authorized Signatory** :

*Sam Chen*

(Sam Chen)



| Table of Contents                                  | Page |
|----------------------------------------------------|------|
| 1 . TEST SUMMARY                                   | 4    |
| 1.1 TEST FACILITY                                  | 5    |
| 1.2 MEASUREMENT UNCERTAINTY                        | 5    |
| 2 . GENERAL INFORMATION                            | 7    |
| 2.1 GENERAL DESCRIPTION OF EUT                     | 7    |
| 2.2 DESCRIPTION OF TEST MODES                      | 8    |
| 2.3 DESCRIPTION OF TEST SETUP                      | 9    |
| 2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL | 10   |
| 2.5 MEASUREMENT INSTRUMENTS LIST                   | 11   |
| 3 . EMC EMISSION TEST                              | 12   |
| 3.1 RADIATED EMISSION MEASUREMENT                  | 12   |
| 3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT      | 12   |
| 3.1.2 LIMITS OF DISTURBANCE POWER MEASUREMENT      | 12   |
| 3.1.3 TEST PROCEDURE                               | 12   |
| 3.1.4 TEST SETUP                                   | 13   |
| 3.1.5 EUT OPERATING CONDITIONS                     | 13   |
| 3.1.6 TEST RESULTS (30MHz ~1000MHz)                | 14   |
| 4 . EMC IMMUNITY TEST                              | 22   |
| 4.1 STANDARD COMPLIANCE/ SEVERITY LEVEL/ CRITERIA  | 22   |
| 4.2 GENERAL PERFORMANCE CRITERIA                   | 23   |
| 4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP        | 23   |
| 4.4 ESD TESTING                                    | 24   |
| 4.4.1 TEST SPECIFICATION                           | 24   |
| 4.4.2 TEST PROCEDURE                               | 24   |
| 4.4.3 TEST SETUP                                   | 25   |
| 4.4.4 TEST RESULTS                                 | 26   |
| 5 . EUT TEST PHOTO                                 | 27   |
| ATTACHMENT PHOTOGRAPHS OF EUT                      | 28   |

## 1. TEST SUMMARY

Test procedures according to the technical standards:

| EMC Emission                        |                                |                         |          |          |
|-------------------------------------|--------------------------------|-------------------------|----------|----------|
| Standard                            | Test Item                      | Limit                   | Judgment | Remark   |
| EN 55014-1:<br>2006+A1:2009+A2:2011 | Conducted Emission             | -----                   | N/A      |          |
|                                     | Radiated Emission              | -----                   | PASS     |          |
| EMC Immunity                        |                                |                         |          |          |
| Section<br>EN55014-2: 2015          | Test Item                      | Performance<br>Criteria | Judgment | Remark   |
| EN 61000-4-2                        | Electrostatic Discharge        | B                       | PASS     |          |
| EN 61000-4-3                        | RF electromagnetic field       | A                       | N/A      | NOTE (2) |
| EN 61000-4-4                        | Fast transients                | B                       | N/A      |          |
| EN 61000-4-5                        | Surges                         | B                       | N/A      |          |
| EN 61000-4-6                        | Injected Current               | A                       | N/A      |          |
| EN 61000-4-11                       | Volt. Interruptions Volt. Dips | C / C / C               | N/A      | NOTE (3) |

### NOTE:

- (1) 'N/A' denotes test is not applicable in this Test Report
- (2) This test is not required when the EUT is judged to be category III according to EN55014-2.
- (3) Voltage Interruption: 100% reduction – Performance Criteria **C**  
Voltage dip: 30% reduction – Performance Criteria **C**  
Voltage dip: 60% reduction – Performance Criteria **C**
- (4) For client's request and manual description, the test will not be executed.

### 1.1 TEST FACILITY

Shenzhen NTEK Testing Technology Co., Ltd.

Add. : 1/F, Building E, Fenda Science Park, Sanwei Community, Xixiang Street Bao'an District, Shenzhen 518126 P.R. China

CNAS-Lab. : The Laboratory has been assessed and proved to be in compliance with CNAS-CL01:2006 (identical to ISO/IEC 17025:2005)  
The Certificate Registration Number is L5516

IC-Registration : The Certificate Registration Number is 9270A-1

FCC- Accredited : Test Firm Registration Number: 463705  
Designation Number: CN1184

A2LA-Lab. : The Certificate Registration Number is 4298.01  
This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005 General requirements for the competence of testing and calibration laboratories.  
This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 8 January 2009).

### 1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement  $y \pm U$ , where expanded uncertainty  $U$  is based on a standard uncertainty multiplied by a coverage factor of  $k=2$ , providing a level of confidence of approximately **95 %**.

| Test Item                          | Measurement Frequency Range | K | U(dB) |
|------------------------------------|-----------------------------|---|-------|
| AC Mains Conducted Emission        | 0.009kHz ~ 0.15MHz          | 2 | 2.66  |
| AC Mains Conducted Emission        | 0.15MHz ~ 30MHz             | 2 | 2.80  |
| Telecom Conducted Emission (Cat 3) | 0.15MHz ~ 30MHz             | 2 | 2.40  |
| Telecom Conducted Emission (Cat 5) | 0.15MHz ~ 30MHz             | 2 | 2.58  |
| Radiated Emission                  | 30MHz ~ 1000MHz             | 2 | 2.64  |
| Radiated Emission                  | 1000MHz ~ 6000MHz           | 2 | 2.40  |
| Radiated Emission                  | 6000MHz ~ 18000MHz          | 2 | 2.52  |
| Power Clamp                        | 30MHz ~ 300MHz              | 2 | 2.20  |



## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                            |                                                                                                                                                                                                                |     |
|----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----|
| Equipment                  | Graphene intelligent physiotherapy belt                                                                                                                                                                        |     |
| Model Name                 | PMA-A11                                                                                                                                                                                                        |     |
| Additional Model Number(s) | N/A                                                                                                                                                                                                            |     |
| Model Difference           | N/A                                                                                                                                                                                                            |     |
| Product Description        | The EUT is a Graphene intelligent physiotherapy belt.                                                                                                                                                          |     |
|                            | Operating frequency:                                                                                                                                                                                           | N/A |
|                            | Connecting I/O port:                                                                                                                                                                                           | N/A |
|                            | Based on the application, features, or specification exhibited in User's Manual, the EUT is considered as a Household Device. More details of EUT technical specifications, please refer to the User's Manual. |     |
| Power Source               | DC Voltage                                                                                                                                                                                                     |     |
| Power Rating               | Input: DC 5V, 2A                                                                                                                                                                                               |     |
|                            | Output: DC 5V, 2A                                                                                                                                                                                              |     |

## 2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generates from EUT, the test system was pre-scanning tested base on the consideration of following EUT operation mode or test configuration mode which possible have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.


| Pretest Mode | Description           |
|--------------|-----------------------|
| Mode 1       | Discharging + Working |
| Mode 2       | Charging              |

| For Radiated Test |                       |
|-------------------|-----------------------|
| Final Test Mode   | Description           |
| Mode 1            | Discharging + Working |
| Mode 2            | Charging              |

| For EMS Test    |                       |
|-----------------|-----------------------|
| Final Test Mode | Description           |
| Mode 1          | Discharging + Working |
| Mode 2          | Charging              |

### 2.3 DESCRIPTION OF TEST SETUP

Mode RE: Discharging + Working

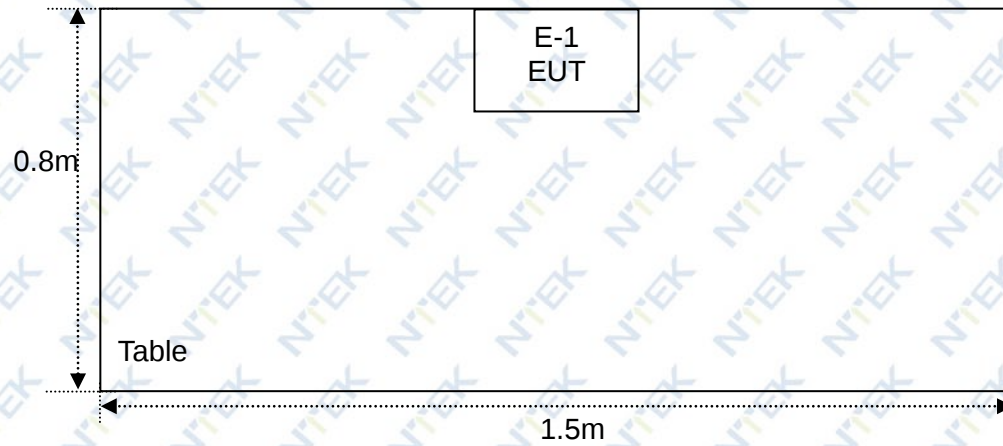

## 2.4 DESCRIPTION TEST PERIPHERAL AND EUT PERIPHERAL

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

| Item | Equipment                               | Brand | Model/Type No. | Series No. | Note |
|------|-----------------------------------------|-------|----------------|------------|------|
| E-1  | Graphene intelligent physiotherapy belt | N/A   | PMA-A11        | N/A        | EUT  |
|      |                                         |       |                |            |      |
|      |                                         |       |                |            |      |
|      |                                         |       |                |            |      |
|      |                                         |       |                |            |      |
|      |                                         |       |                |            |      |
|      |                                         |       |                |            |      |
|      |                                         |       |                |            |      |
|      |                                         |       |                |            |      |

| Item | Shielded Type | Ferrite Core | Length | Note |
|------|---------------|--------------|--------|------|
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |
|      |               |              |        |      |

### Note:

- (1) The support equipment was authorized by Declaration of Confirmation.
- (2) For detachable type I/O cable should be specified the length in cm in 『Length』 column.
- (3) 'YES' means 'shielded' 'with core'; 'NO' means 'unshielded' 'without core'.

## 2.5 MEASUREMENT INSTRUMENTS LIST

### 2.5.1 RADIATED TEST SITE

| Item | Kind of Equipment      | Manufacturer | Type No.    | Serial No. | Last calibration | Calibrated until | Calibration period |
|------|------------------------|--------------|-------------|------------|------------------|------------------|--------------------|
| 1    | Absorbing Clamp        | R&S          | MDS-21      | 100423     | Aug. 10, 2017    | Aug. 09, 2018    | 1 year             |
| 2    | 50Ω Switch             | Anritsu      | MP59B       | 6200983704 | Jun. 06, 2017    | Jun. 05, 2018    | 1 year             |
| 3    | Test Cable             | N/A          | P-01        | N/A        | Jun. 26, 2016    | Jun. 25, 2019    | 3 years            |
| 4    | Bilog Antenna          | TESEQ        | CBL6111D    | 31216      | Apr. 09, 2017    | Apr. 08, 2018    | 1 year             |
| 5    | Test Cable             | N/A          | R-03        | N/A        | Jun. 26, 2016    | Jun. 25, 2019    | 3 years            |
| 6    | Test Cable             | N/A          | R-01        | N/A        | Aug. 08, 2016    | Aug. 07, 2019    | 3 years            |
| 7    | EMI Test Receiver      | R&S          | ESCI        | 101160     | Jun. 06, 2017    | Jun. 05, 2018    | 1 year             |
| 8    | Spectrum Analyzer      | Agilent      | E4440A      | MY41000130 | Apr. 10, 2017    | Apr. 09, 2018    | 1 year             |
| 9    | Antenna Mast           | SKET         | N/A         | N/A        | N/A              | N/A              | N/A                |
| 10   | Antenna Mast           | EM           | SC100       | N/A        | Apr. 26, 2017    | Apr. 25, 2020    | 3 years            |
| 11   | Turn Table             | EM           | SC100_1     | 60531      | Apr. 26, 2017    | Apr. 25, 2020    | 3 years            |
| 12   | 50Ω Switch             | Anritsu      | MP59B       | 6200983705 | Jun. 06, 2017    | Jun. 05, 2018    | 1 year             |
| 13   | Broadband Horn Antenna | EM           | EM-AH-10180 | 2011071402 | Apr. 09, 2017    | Apr. 08, 2018    | 1 year             |
| 14   | Pre-Amplifier          | EMC          | EMC051835SE | 980246     | Aug. 07, 2017    | Aug. 06, 2018    | 1 year             |

### 2.5.2 ESD

| Item | Kind of Equipment  | Manufacturer | Type No. | Serial No.     | Last calibration | Calibrated until | Calibration period |
|------|--------------------|--------------|----------|----------------|------------------|------------------|--------------------|
| 1    | ESD TEST GENERATOR | Lioncel      | ESD-203B | ESD203B0150402 | Oct. 30, 2016    | Oct. 29, 2017    | 1 year             |

### 3. EMC EMISSION TEST

#### 3.1 RADIATED EMISSION MEASUREMENT

##### 3.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT (Below 1000MHz)

| FREQUENCY (MHz) | <input type="checkbox"/> At 10m | <input checked="" type="checkbox"/> At 3m |
|-----------------|---------------------------------|-------------------------------------------|
|                 | dB $\mu$ V/m                    | dB $\mu$ /m                               |
| 30 – 230        | 30                              | 40                                        |
| 230 – 1000      | 37                              | 47                                        |

##### 3.1.2 LIMITS OF DISTURBANCE POWER MEASUREMENT (Below 1000MHz)

|                 |  | Household and similar appliances |                   | Tools                                 |                   |                                                         |                   |                                 |                   |
|-----------------|--|----------------------------------|-------------------|---------------------------------------|-------------------|---------------------------------------------------------|-------------------|---------------------------------|-------------------|
| Frequency Range |  |                                  |                   | Rated motor power not exceeding 700 W |                   | Rated motor power above 700 W and not exceeding 1 000 W |                   | Rated motor power above 1 000 W |                   |
| (MHz)           |  | dB(pW) Quasi-peak                | dB (pW) Average * | dB (pW) Quasi-peak                    | dB (pW) Average * | dB (pW) Quasi-peak                                      | dB (pW) Average * | dB (pW) Quasi-peak              | dB (pW) Average * |
| 30-300          |  | 44-55                            | 35-45             | 44-55                                 | 35-45             | 49-59                                                   | 39-49             | 55-65                           | 45-55             |

\* If the limit for the measurement with the average detector is met when using a receiver with a quasi-peak detector, the equipment under test shall be deemed to meet both limits and the measurement using the receiver with an average detector need not be carried out.

Notes:


- (1) The limit for radiated test was performed according to as following: CISPR 14.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dB $\mu$ V/m)=20log Emission level (uV/m).

##### 3.1.3 TEST PROCEDURE


- a. The measuring distance of at 3 m shall be used for measurements at frequency up to 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter open area test site. The table was rotated 360 degrees to determine the position of the highest radiation.
- c. The height of the equipment or of the substitution antenna shall be 0.8 m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured, above 1G Average detector mode will be instead.
- e. If the Peak Mode measured value compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP(AV) Limits and then no additional QP Mode measurement performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

### 3.1.4 TEST SETUP

#### (A) Radiated Emission Test Set-Up Frequency Below 1 GHz.

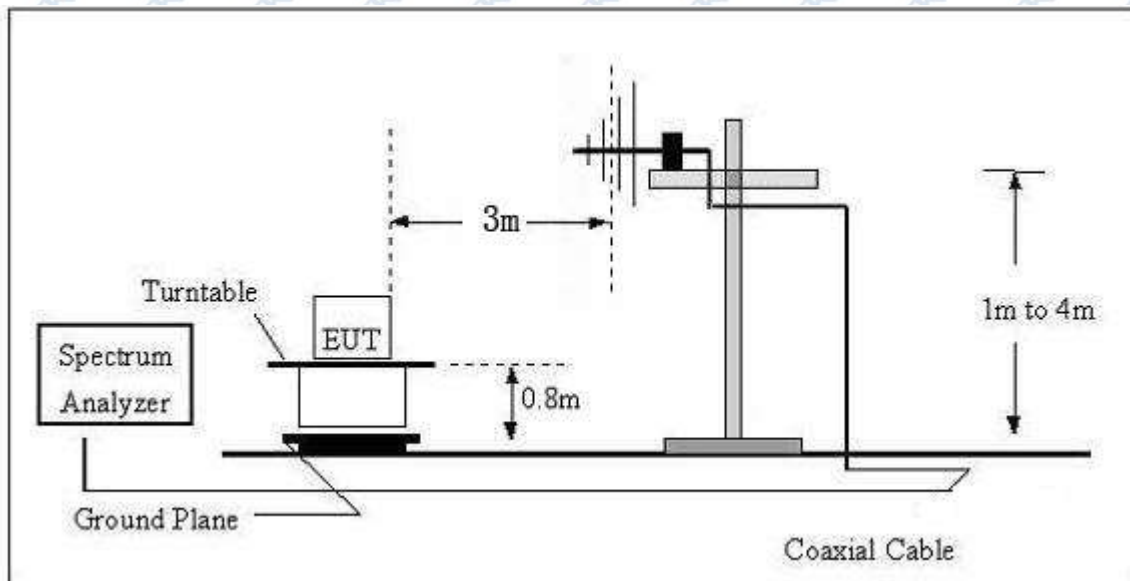

#### (B) Radiated Emission Test Set-Up Frequency Above 30 MHz

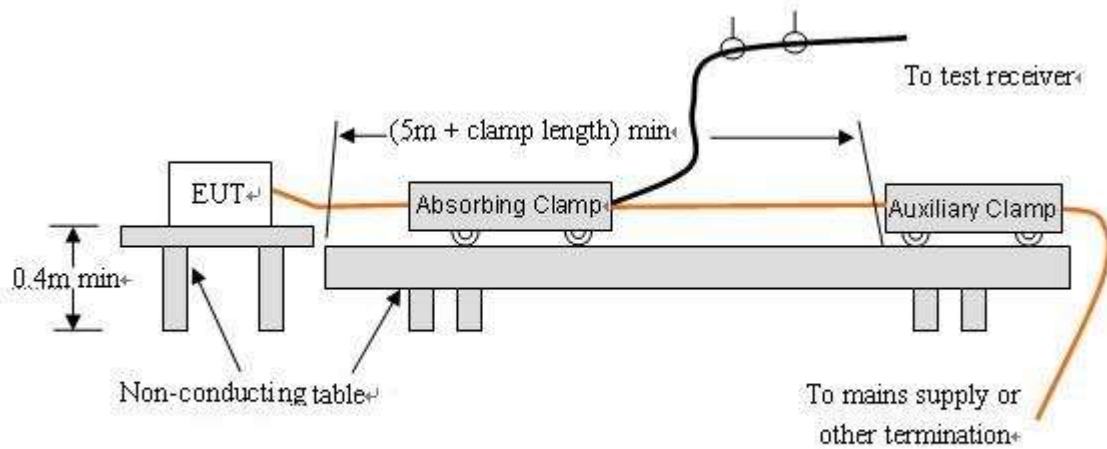


### 3.1.5 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

### 3.1.6 TEST RESULTS (30MHz ~1000MHz)

|              |                                         |                    |            |
|--------------|-----------------------------------------|--------------------|------------|
| EUT:         | Graphene intelligent physiotherapy belt | Model Name:        | PMA-A11    |
| Temperature: | 24℃                                     | Relative Humidity: | 54%        |
| Pressure:    | 1010hPa                                 | Test Date :        | 2017-10-25 |
| Test Mode:   | Discharging + Working(High)             | Test Port:         | Horizontal |
| Test Power:  | DC 5V                                   |                    |            |

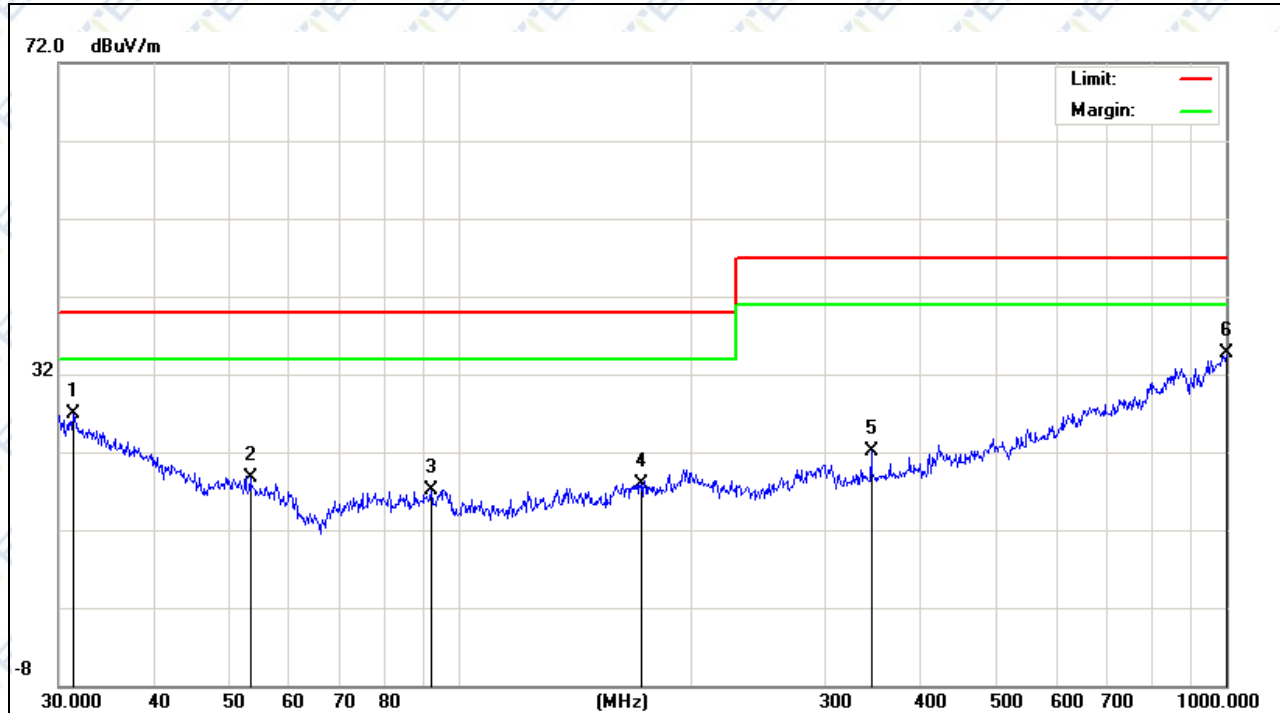


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|---------------------------|---------|
| 1   |     | 31.2893      | 6.33                     | 20.65                   | 26.98                      | 40.00           | -13.02     | QP                      |                           |         |
| 2   |     | 53.3179      | 6.17                     | 12.62                   | 18.79                      | 40.00           | -21.21     | QP                      |                           |         |
| 3   |     | 91.8162      | 5.18                     | 11.89                   | 17.07                      | 40.00           | -22.93     | QP                      |                           |         |
| 4   |     | 172.5988     | 5.28                     | 12.64                   | 17.92                      | 40.00           | -22.08     | QP                      |                           |         |
| 5   |     | 344.3854     | 7.83                     | 14.30                   | 22.13                      | 47.00           | -24.87     | QP                      |                           |         |
| 6   | *   | 1000.000     | 6.36                     | 28.25                   | 34.61                      | 47.00           | -12.39     | QP                      |                           |         |

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

|              |                                         |                    |            |
|--------------|-----------------------------------------|--------------------|------------|
| EUT:         | Graphene intelligent physiotherapy belt | Model Name:        | PMA-A11    |
| Temperature: | 24°C                                    | Relative Humidity: | 54%        |
| Pressure:    | 1010hPa                                 | Test Date :        | 2017-10-25 |
| Test Mode:   | Discharging + Working(High)             | Test Port:         | Vertical   |
| Test Power:  | DC 5V                                   |                    |            |

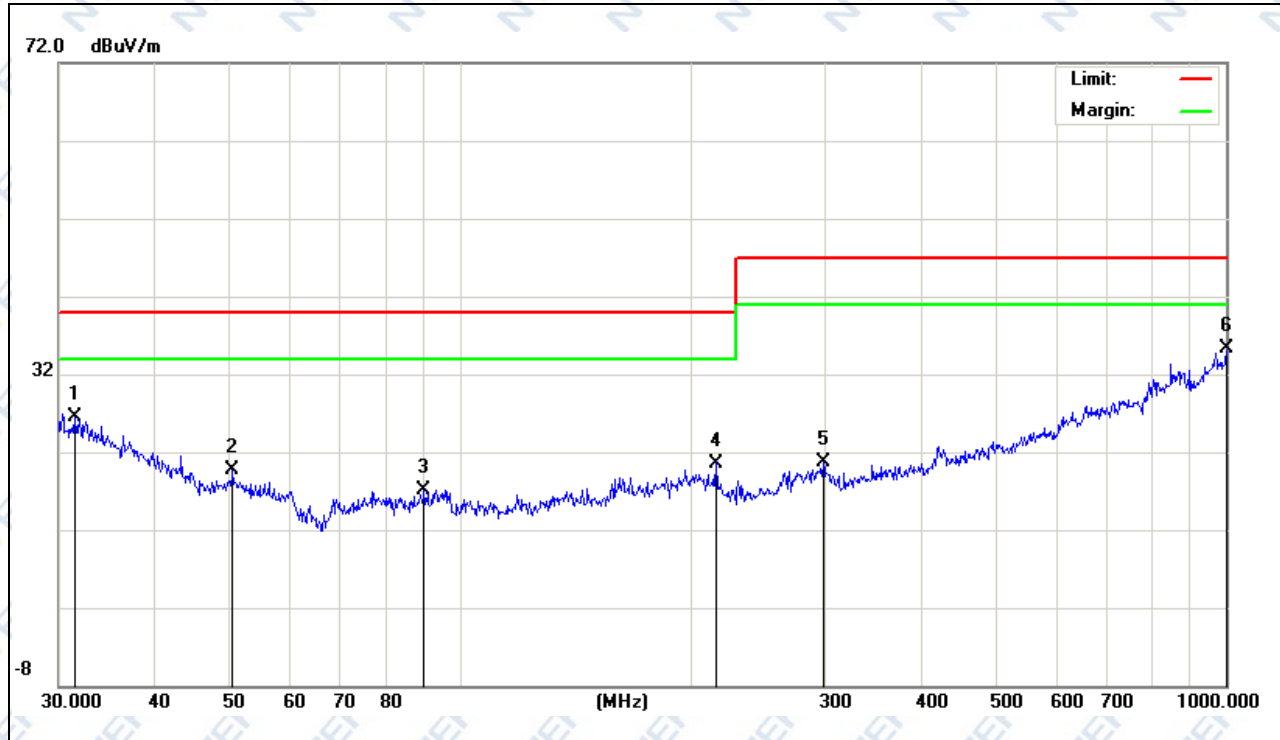


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 31.5095  | 5.97          | 20.55          | 26.52       | 40.00  | -13.48 | QP             |              |         |
| 2   |     | 50.5859  | 6.34          | 13.32          | 19.66       | 40.00  | -20.34 | QP             |              |         |
| 3   |     | 89.9047  | 5.35          | 11.77          | 17.12       | 40.00  | -22.88 | QP             |              |         |
| 4   |     | 216.0240 | 7.51          | 13.09          | 20.60       | 40.00  | -19.40 | QP             |              |         |
| 5   |     | 298.2681 | 5.96          | 14.68          | 20.64       | 47.00  | -26.36 | QP             |              |         |
| 6   | *   | 1000.000 | 7.09          | 28.25          | 35.34       | 47.00  | -11.66 | QP             |              |         |

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

|              |                                         |                    |            |
|--------------|-----------------------------------------|--------------------|------------|
| EUT:         | Graphene intelligent physiotherapy belt | Model Name:        | PMA-A11    |
| Temperature: | 24°C                                    | Relative Humidity: | 54%        |
| Pressure:    | 1010hPa                                 | Test Date :        | 2017-10-25 |
| Test Mode:   | Discharging + Working(Middle)           | Test Port:         | Horizontal |
| Test Power:  | DC 5V                                   |                    |            |

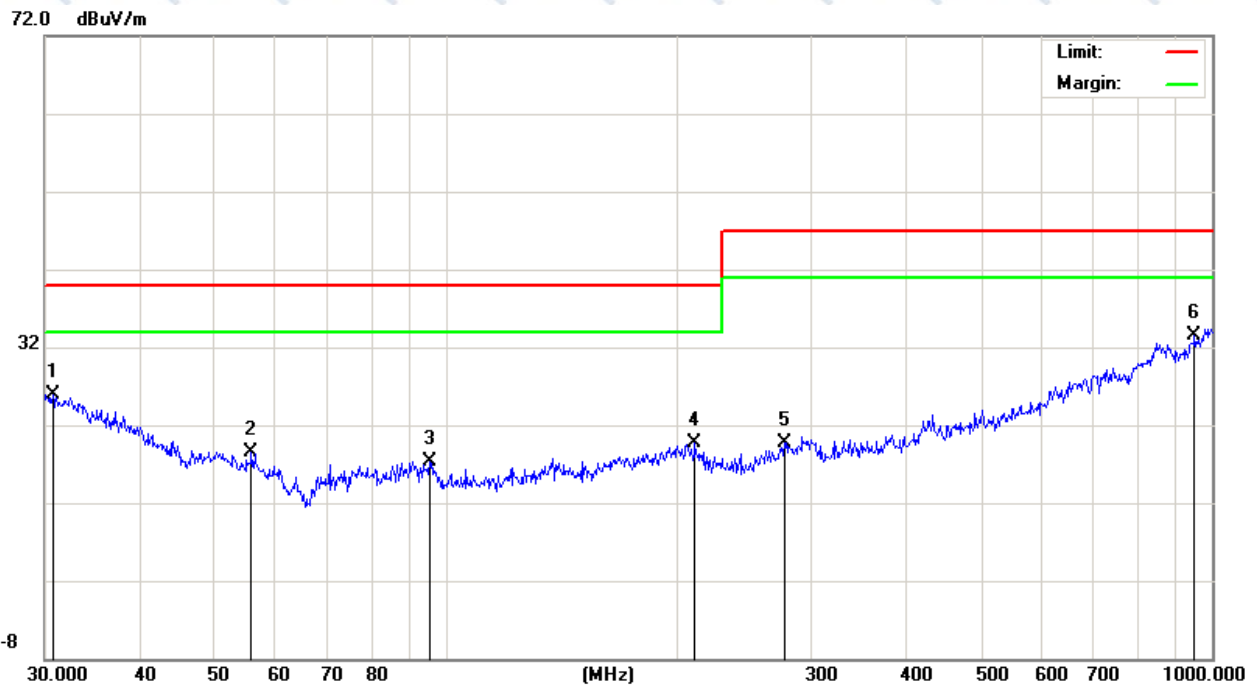


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Over<br>dB | Antenna<br>Height<br>cm | Table<br>Degree<br>degree | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|------------|-------------------------|---------------------------|---------|
| 1   |     | 30.7455      | 4.97                     | 20.89                   | 25.86                      | 40.00           | -14.14     | QP                      |                           |         |
| 2   |     | 55.8046      | 6.32                     | 12.21                   | 18.53                      | 40.00           | -21.47     | QP                      |                           |         |
| 3   |     | 95.4270      | 5.18                     | 12.07                   | 17.25                      | 40.00           | -22.75     | QP                      |                           |         |
| 4   |     | 211.5263     | 6.33                     | 13.28                   | 19.61                      | 40.00           | -20.39     | QP                      |                           |         |
| 5   |     | 277.0935     | 5.74                     | 14.03                   | 19.77                      | 47.00           | -27.23     | QP                      |                           |         |
| 6   | *   | 948.7610     | 6.88                     | 26.64                   | 33.52                      | 47.00           | -13.48     | QP                      |                           |         |

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

|              |                                         |                    |            |
|--------------|-----------------------------------------|--------------------|------------|
| EUT:         | Graphene intelligent physiotherapy belt | Model Name:        | PMA-A11    |
| Temperature: | 24℃                                     | Relative Humidity: | 54%        |
| Pressure:    | 1010hPa                                 | Test Date :        | 2017-10-25 |
| Test Mode:   | Discharging + Working(Middle)           | Test Port:         | Vertical   |
| Test Power:  | DC 5V                                   |                    |            |

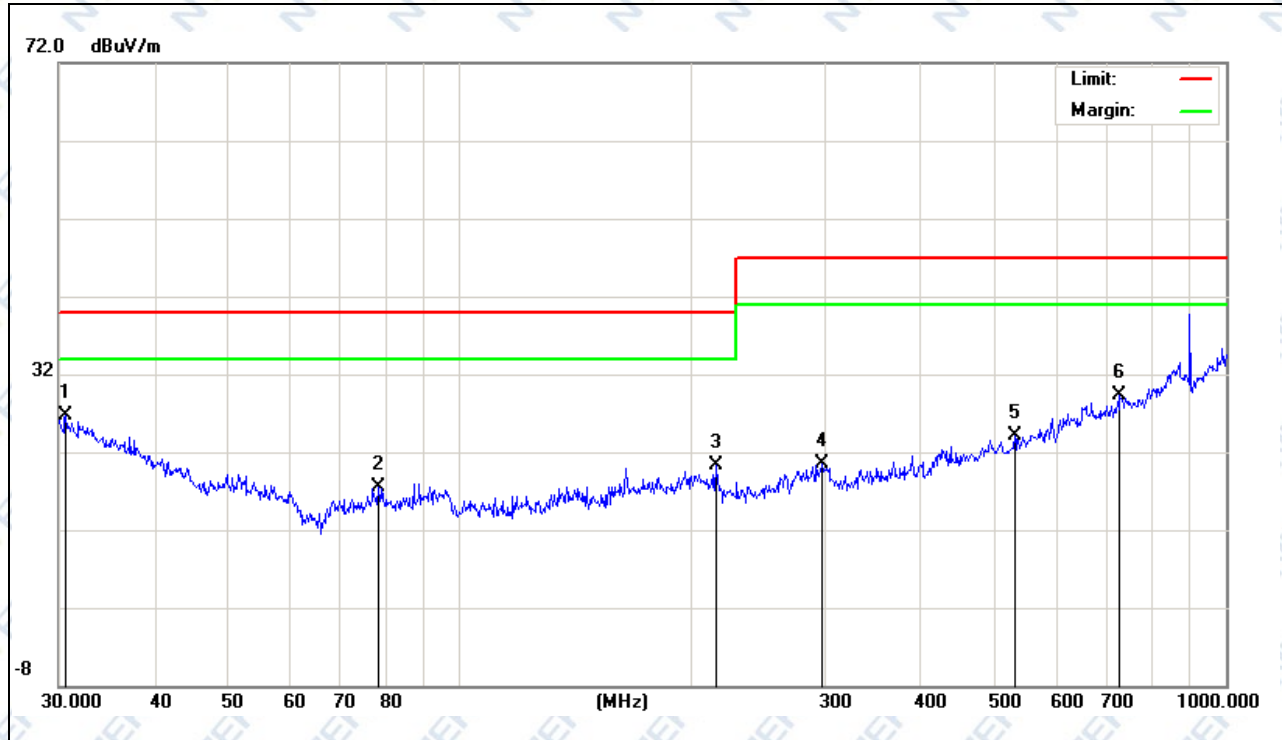


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   | *   | 30.6379  | 5.75          | 20.93          | 26.68       | 40.00  | -13.32 | QP             |              |         |
| 2   |     | 78.4133  | 5.87          | 11.56          | 17.43       | 40.00  | -22.57 | QP             |              |         |
| 3   |     | 216.0240 | 7.18          | 13.09          | 20.27       | 40.00  | -19.73 | QP             |              |         |
| 4   |     | 297.2241 | 5.90          | 14.66          | 20.56       | 47.00  | -26.44 | peak           |              |         |
| 5   |     | 530.1014 | 6.30          | 17.79          | 24.09       | 47.00  | -22.91 | peak           |              |         |
| 6   |     | 726.8052 | 7.18          | 22.05          | 29.23       | 47.00  | -17.77 | QP             |              |         |

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

|              |                                         |                    |            |
|--------------|-----------------------------------------|--------------------|------------|
| EUT:         | Graphene intelligent physiotherapy belt | Model Name:        | PMA-A11    |
| Temperature: | 24°C                                    | Relative Humidity: | 54%        |
| Pressure:    | 1010hPa                                 | Test Date :        | 2017-10-25 |
| Test Mode:   | Discharging + Working(Low)              | Test Port:         | Horizontal |
| Test Power:  | DC 5V                                   |                    |            |

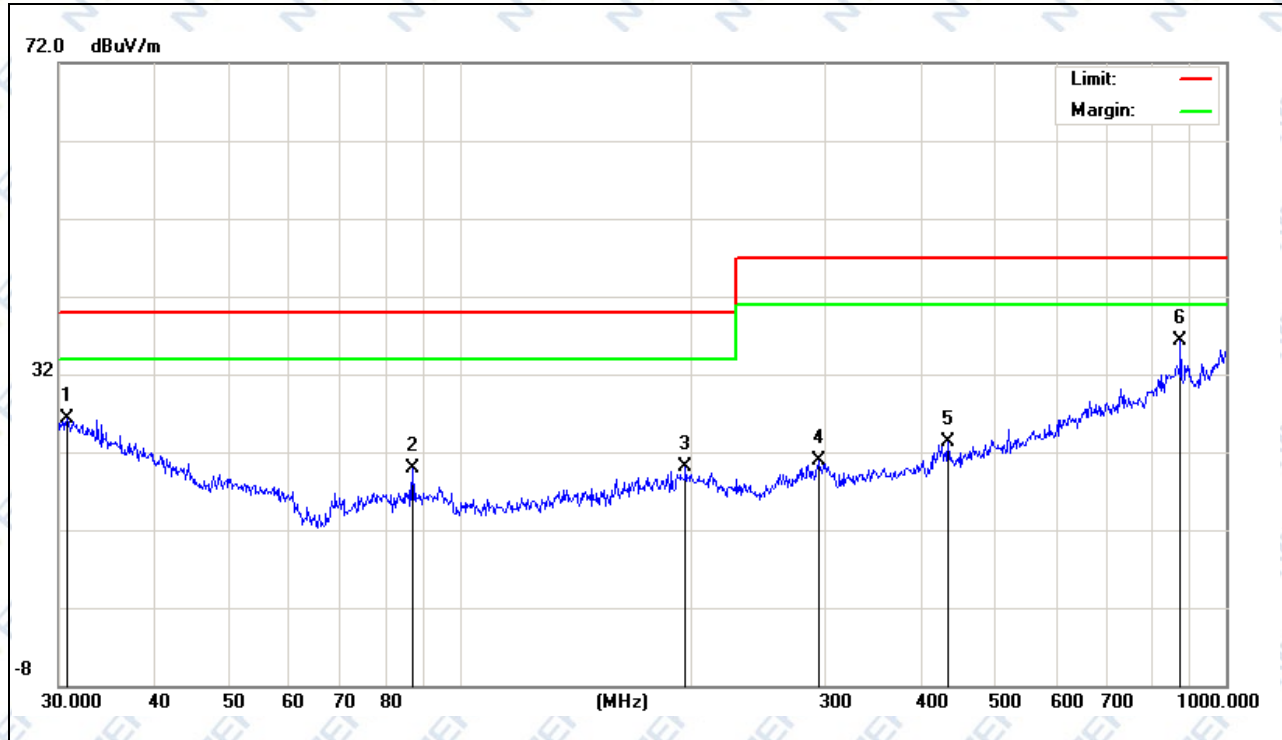


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 30.7455  | 5.48          | 20.89          | 26.37       | 40.00  | -13.63 | QP             |              |         |
| 2   |     | 86.8067  | 8.48          | 11.42          | 19.90       | 40.00  | -20.10 | QP             |              |         |
| 3   |     | 197.2000 | 6.45          | 13.75          | 20.20       | 40.00  | -19.80 | QP             |              |         |
| 4   |     | 294.1137 | 6.46          | 14.49          | 20.95       | 47.00  | -26.05 | QP             |              |         |
| 5   |     | 434.0650 | 6.94          | 16.36          | 23.30       | 47.00  | -23.70 | QP             |              |         |
| 6   | *   | 872.1832 | 10.41         | 25.93          | 36.34       | 47.00  | -10.66 | QP             |              |         |

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

|              |                                         |                    |            |
|--------------|-----------------------------------------|--------------------|------------|
| EUT:         | Graphene intelligent physiotherapy belt | Model Name:        | PMA-A11    |
| Temperature: | 24°C                                    | Relative Humidity: | 54%        |
| Pressure:    | 1010hPa                                 | Test Date :        | 2017-10-25 |
| Test Mode:   | Discharging + Working(Low)              | Test Port:         | Vertical   |
| Test Power:  | DC 5V                                   |                    |            |

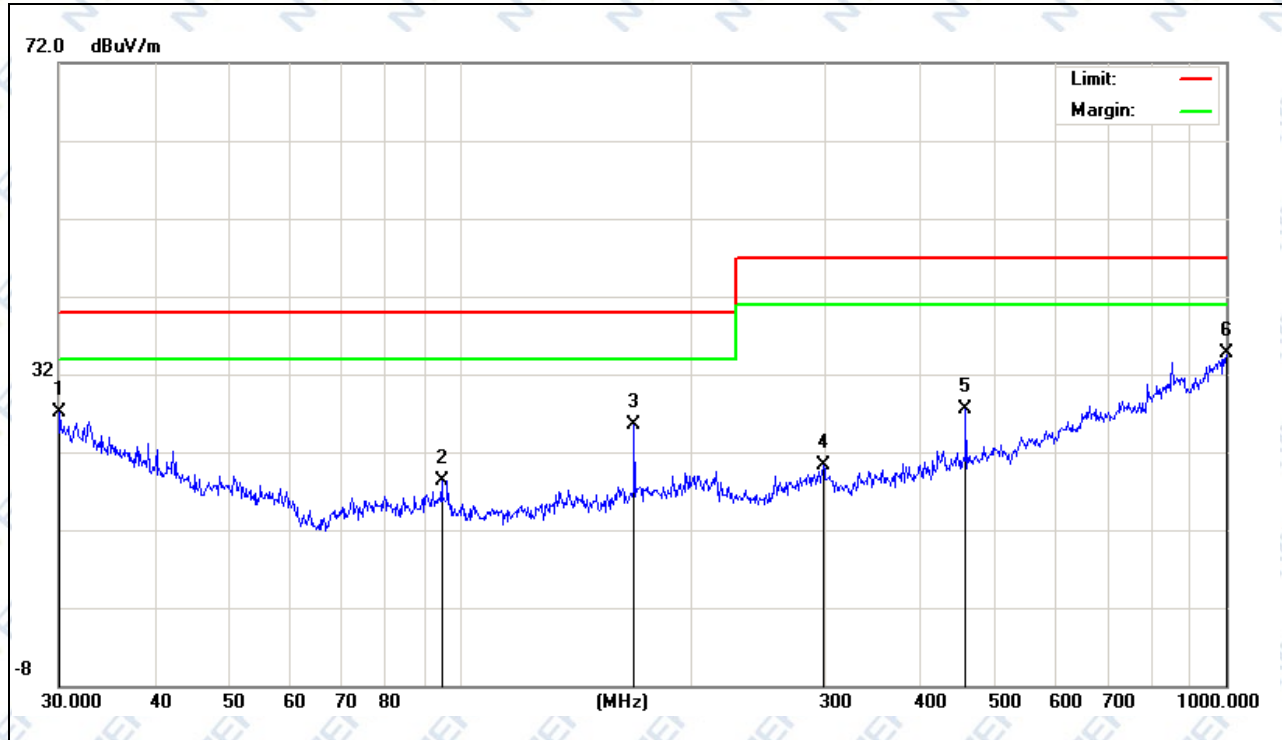


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 30.1053  | 5.97          | 21.15          | 27.12       | 40.00  | -12.88 | QP             |              |         |
| 2   |     | 94.7600  | 6.28          | 12.06          | 18.34       | 40.00  | -21.66 | QP             |              |         |
| 3   |     | 169.0054 | 12.96         | 12.61          | 25.57       | 40.00  | -14.43 | QP             |              |         |
| 4   |     | 298.2681 | 5.67          | 14.68          | 20.35       | 47.00  | -26.65 | QP             |              |         |
| 5   |     | 457.5072 | 11.11         | 16.40          | 27.51       | 47.00  | -19.49 | QP             |              |         |
| 6   | *   | 1000.000 | 6.44          | 28.25          | 34.69       | 47.00  | -12.31 | QP             |              |         |

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

|              |                                         |                    |            |
|--------------|-----------------------------------------|--------------------|------------|
| EUT:         | Graphene intelligent physiotherapy belt | Model Name:        | PMA-A11    |
| Temperature: | 24°C                                    | Relative Humidity: | 54%        |
| Pressure:    | 1010hPa                                 | Test Date :        | 2017-10-25 |
| Test Mode:   | Charging                                | Test Port:         | Horizontal |
| Test Power:  | DC 5V powered by Adapter                |                    |            |

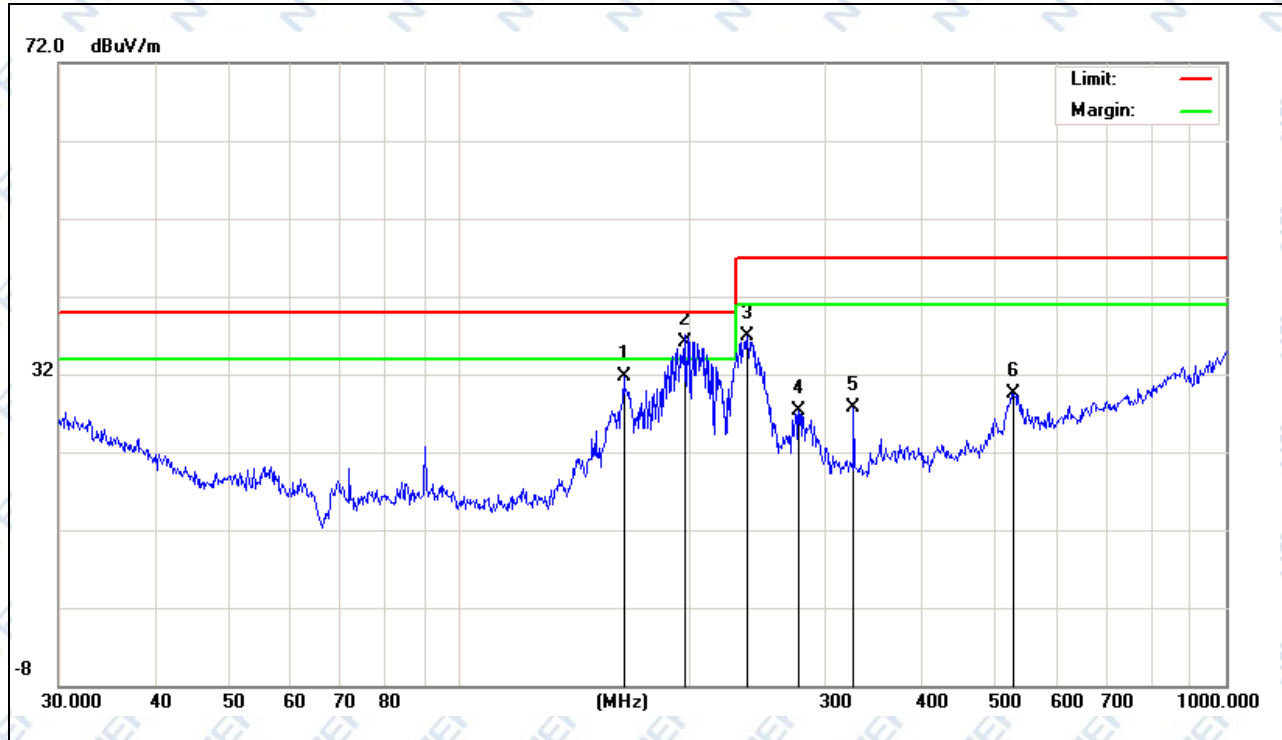


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |        |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|--------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector       | cm           | degree |
| 1   |     | 163.7549 | 19.21         | 12.42          | 31.63       | 40.00  | -8.37  | QP             |              |        |
| 2   | *   | 197.2001 | 22.35         | 13.75          | 36.10       | 40.00  | -3.90  | QP             |              |        |
| 3   |     | 237.4760 | 24.88         | 12.01          | 36.89       | 47.00  | -10.11 | QP             |              |        |
| 4   |     | 277.0935 | 13.20         | 14.03          | 27.23       | 47.00  | -19.77 | QP             |              |        |
| 5   |     | 326.7395 | 14.03         | 13.74          | 27.77       | 47.00  | -19.23 | QP             |              |        |
| 6   |     | 528.2458 | 11.89         | 17.66          | 29.55       | 47.00  | -17.45 | QP             |              |        |

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

|              |                                         |                    |            |
|--------------|-----------------------------------------|--------------------|------------|
| EUT:         | Graphene intelligent physiotherapy belt | Model Name:        | PMA-A11    |
| Temperature: | 24°C                                    | Relative Humidity: | 54%        |
| Pressure:    | 1010hPa                                 | Test Date :        | 2017-10-25 |
| Test Mode:   | Charging                                | Test Port:         | Vertical   |
| Test Power:  | DC 5V powered by Adapter                |                    |            |

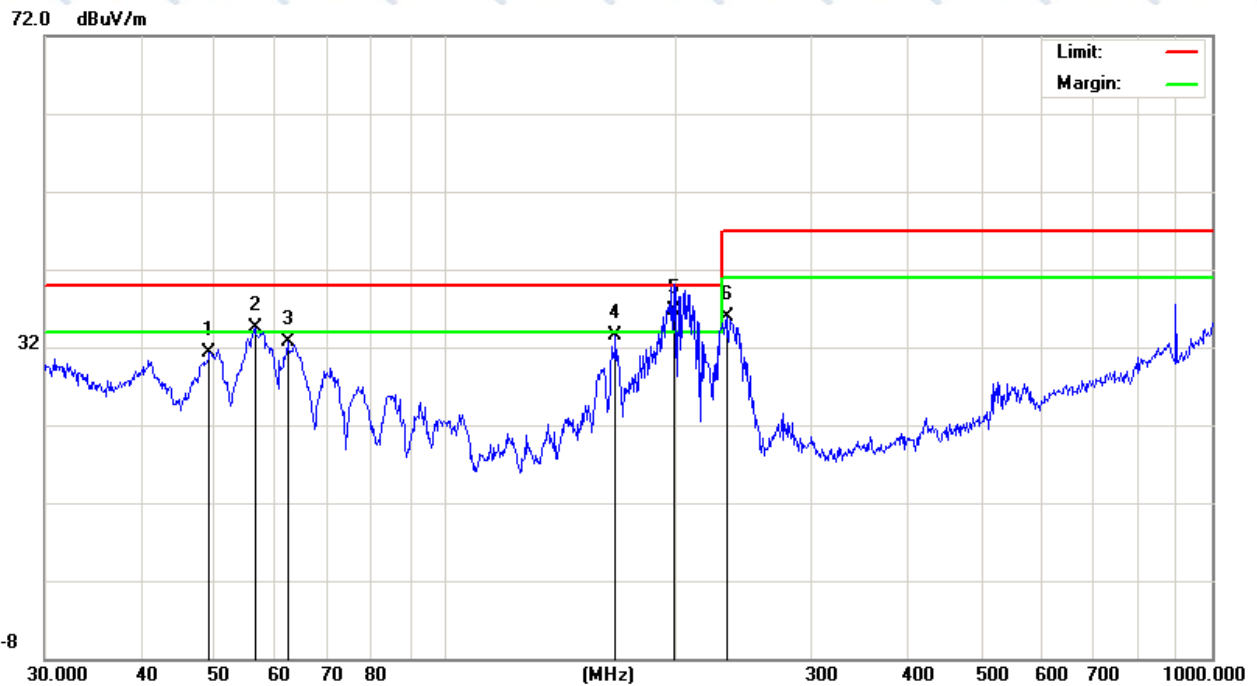

| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Over   | Antenna Height | Table Degree |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------------|--------------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | cm             | degree       | Comment |
| 1   |     | 49.1865  | 17.96         | 13.35          | 31.31       | 40.00  | -8.69  | QP             |              |         |
| 2   | !   | 56.3948  | 22.42         | 12.11          | 34.53       | 40.00  | -5.47  | QP             |              |         |
| 3   |     | 62.2128  | 23.61         | 9.03           | 32.64       | 40.00  | -7.36  | QP             |              |         |
| 4   |     | 166.6512 | 20.93         | 12.53          | 33.46       | 40.00  | -6.54  | QP             |              |         |
| 5   | *   | 198.5880 | 23.05         | 13.75          | 36.80       | 40.00  | -3.20  | QP             |              |         |
| 6   |     | 233.3487 | 23.89         | 12.05          | 35.94       | 47.00  | -11.06 | QP             |              |         |

Remark:

Factor = Antenna Factor + Cable Loss - Amplifier.

#### 4. EMC IMMUNITY TEST

##### 4.1 STANDARD COMPLIANCE/ SEVERITY LEVEL/ CRITERIA

| Tests<br>Standard No.      | TEST SPECIFICATION                         | Test Mode<br>Test Ports | Perform.<br>Criteria |
|----------------------------|--------------------------------------------|-------------------------|----------------------|
| 1. ESD<br>IEC/EN 61000-4-2 | 8kV air discharge<br>4kV contact discharge | Direct Mode             | B                    |
|                            | 4kV HCP discharge<br>4kV VCP discharge     | Indirect Mode           | B                    |

## 4.2 GENERAL PERFORMANCE CRITERIA

According to **EN 55014-2** standard, the general performance criteria as following:

|                    |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
|--------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Criterion A</b> | <p>The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.</p> <p>The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.</p> |
| <b>Criterion B</b> | <p>After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.</p> <p>The performance level may be replaced by a permissible loss of performance. During the test, degradation of performance is allowed. However, no change of operating state or stored data is allowed to persist after the test.</p>                                                                       |
| <b>Criterion C</b> | <p>Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.</p> <p>Functions, and/or information stored in non-volatile memory, or protected by a battery backup, shall not be lost.</p>                                                                                                                                                                                                                                                                                                 |

## 4.3 GENERAL PERFORMANCE CRITERIA TEST SETUP

The EUT tested system was configured as the statements of **2.3** Unless otherwise a special operating condition is specified in the follows during the testing.

#### 4.4 ESD TESTING

##### 4.4.1 TEST SPECIFICATION

|                       |                                                                                                  |
|-----------------------|--------------------------------------------------------------------------------------------------|
| Basic Standard:       | IEC/EN 61000-4-2                                                                                 |
| Discharge Impedance:  | 330ohm / 150pF                                                                                   |
| Required Performance: | B                                                                                                |
| Discharge Voltage:    | Air Discharge:2kV/4kV/8kV (Direct)<br>Contact Discharge:2kV/4kV (Direct/Indirect)                |
| Polarity:             | Positive & Negative                                                                              |
| Number of Discharge:  | Air Discharge: min. 20 times at each test point<br>Contact Discharge: min. 20 at each test point |
| Discharge Mode:       | Single Discharge                                                                                 |
| Discharge Period:     | 1 second minimum                                                                                 |

##### 4.4.2 TEST PROCEDURE

The test generator necessary to perform direct and indirect application of discharges to the EUT in the following manner:

- a. Contact discharge was applied to conductive surfaces and coupling planes of the EUT. During the test, it was performed with single discharges. For the single discharge time between successive single discharges was at least 1 second. The EUT shall be exposed to at least 200 discharges, 100 each at negative and positive polarity, at a minimum of four test points. One of the test points shall be subjected to at least 50 indirect discharges to the center of the front edge of the horizontal coupling plane. The remaining three test points shall each receive at least 50 direct contact discharges.

If no direct contact test points are available, then at least 200 indirect discharges shall be applied in the indirect mode. Test shall be performed at a maximum repetition rate of one discharge per second.

Vertical Coupling Plane (VCP):

The coupling plane, of dimensions 0.5m x 0.5m, is placed parallel to, and positioned at a distance 0.1m from, the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

Horizontal Coupling Plane (HCP):


The coupling plane is placed under to the EUT. The generator shall be positioned vertically at a distance of 0.1m from the EUT, with the Discharge Electrode touching the coupling plane.

The four faces of the EUT will be performed with electrostatic discharge.

- b. Air discharges at insulation surfaces of the EUT.

It was at least ten single discharges with positive and negative at the same selected point.

#### 4.4.3 TEST SETUP

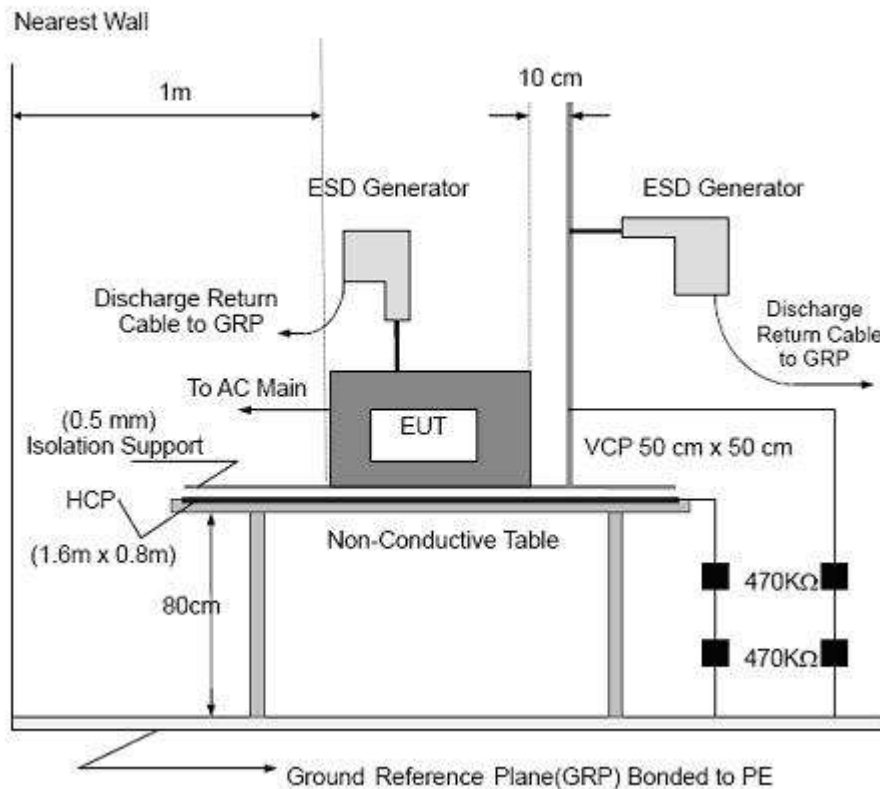

Note:

##### TABLE-TOP EQUIPMENT

The configuration consisted of a wooden table 0.8 meters high standing on the Ground Reference Plane. The GRP consisted of a sheet of aluminum at least 0.25mm thick, and 2.5 meters square connected to the protective grounding system. A Horizontal Coupling Plane (1.6m x 0.8m) was placed on the table and attached to the GRP by means of a cable with 940k total impedance. The equipment under test, was installed in a representative system as described in section 7 of IEC /EN 61000-4-2, and its cables were placed on the HCP and isolated by an insulating support of 0.5mm thickness. A distance of 1-meter minimum was provided between the EUT and the walls of the laboratory and any other metallic structure.

##### FLOOR-STANDING EQUIPMENT

The equipment under test was installed in a representative system as described in section 7 of IEC/EN 61000-4-2, and its cables were isolated from the Ground Reference Plane by an insulating support of 0.1-meter thickness. The GRP consisted of a sheet of aluminum that is at least 0.25mm thick, and 2.5meters square connected to the protective grounding system and extended at least 0.5 meters from the EUT on all sides.

#### 4.4.4 TEST RESULTS

|              |                                         |                    |            |
|--------------|-----------------------------------------|--------------------|------------|
| EUT:         | Graphene intelligent physiotherapy belt | Model Name:        | PMA-A11    |
| Temperature: | 25°C                                    | Relative Humidity: | 45%        |
| Pressure:    | 1010hPa                                 | Test Date :        | 2017-10-25 |
| Test Mode:   | Discharging + Working / Charging        |                    |            |
| Test Power:  | DC 5V / DC 5V powered by Adapter        |                    |            |

| Mode           | Contact Discharge (Indirect) |   |   |   |   |   |   | Criterion | Result   |  |  |
|----------------|------------------------------|---|---|---|---|---|---|-----------|----------|--|--|
| Test level(kV) | Test Point                   | 2 |   | 4 |   | 6 |   |           |          |  |  |
| Test Location  |                              | + | - | + | - | + | - |           |          |  |  |
| HCP            | Front                        | P | P | P | P |   |   | B         | Complies |  |  |
|                | Rear                         | P | P | P | P |   |   |           |          |  |  |
|                | Left                         | P | P | P | P |   |   |           |          |  |  |
|                | Right                        | P | P | P | P |   |   |           |          |  |  |
| VCP            | Front                        | P | P | P | P |   |   |           |          |  |  |
|                | Rear                         | P | P | P | P |   |   |           |          |  |  |
|                | Left                         | P | P | P | P |   |   |           |          |  |  |
|                | Right                        | P | P | P | P |   |   |           |          |  |  |

| Mode           | Air Discharge |   |   |   |   |   |    |   | Contact Discharge |   |   |   |   |   |   |   | Criterion | Result   |
|----------------|---------------|---|---|---|---|---|----|---|-------------------|---|---|---|---|---|---|---|-----------|----------|
| Test level(kV) | 2             |   | 4 |   | 8 |   | 15 |   | 2                 |   | 4 |   | 6 |   | 8 |   |           |          |
| Test Location  | +             | - | + | - | + | - | +  | - | +                 | - | + | - | + | - | + | - |           |          |
| Gap            | P             | P | P | P | P | P |    |   |                   |   |   |   |   |   |   |   | B         | Complies |
| Button         | P             | P | P | P | P | P |    |   |                   |   |   |   |   |   |   |   |           |          |
| LED            | P             | P | P | P | P | P |    |   |                   |   |   |   |   |   |   |   |           |          |
| USB port       |               |   |   |   |   |   |    |   | P                 | P | P | P |   |   |   |   |           |          |
| Micro USB port |               |   |   |   |   |   |    |   | P                 | P | P | P |   |   |   |   |           |          |

Note:

- 1) +/- denotes the Positive/Negative polarity of the output voltage.
- 2) Test location(s) in which discharge (Air and contact discharge) to be applied illustrated by photos shown in next page(s)
- 3) In the table: 'P' represents 'PASS'; 'F' represents 'FAIL'.
- 4) Criteria A: Normal performance within limits specified by the manufacturer, requestor or purchaser.
- 5) Criteria B: Temporary loss of function or degradation of performance which ceases after the disturbance ceases, and from which the EUT recovers its normal performance, without operator intervention.
- 6) Criteria C: Temporary loss of function or degradation of performance, the correction of which requires operator intervention.
- 7) Criteria D: Loss of function or degradation of performance which is not recoverable, owing to damage to hardware or software, or loss of data.

## 5. EUT TEST PHOTO

### Radiated Measurement Photos



## ATTACHMENT PHOTOGRAPHS OF EUT

Photo 1



Photo 2



Photo 3

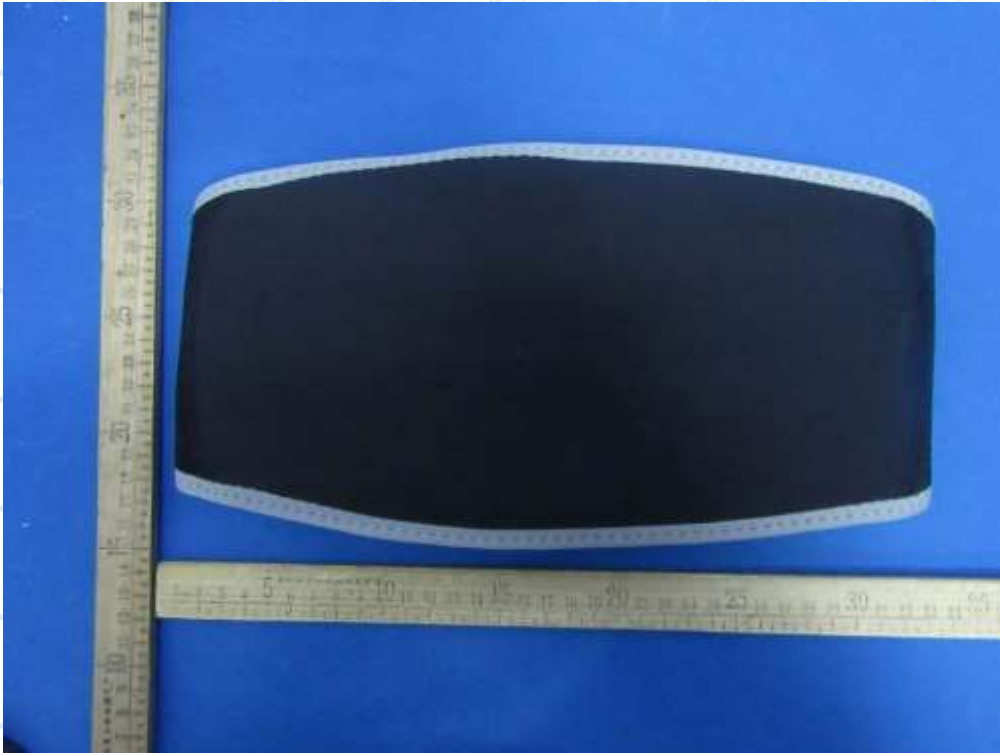


Photo 4



Photo 5



Photo 6



Photo 7



Photo 8



Photo 9



Photo 10

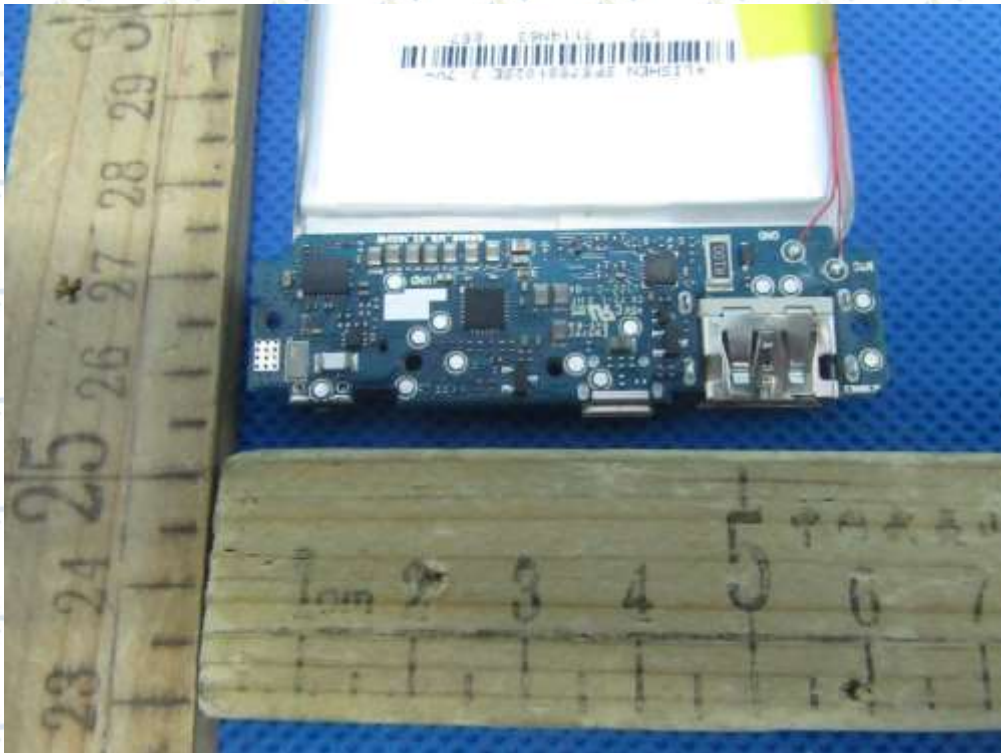


Photo 11

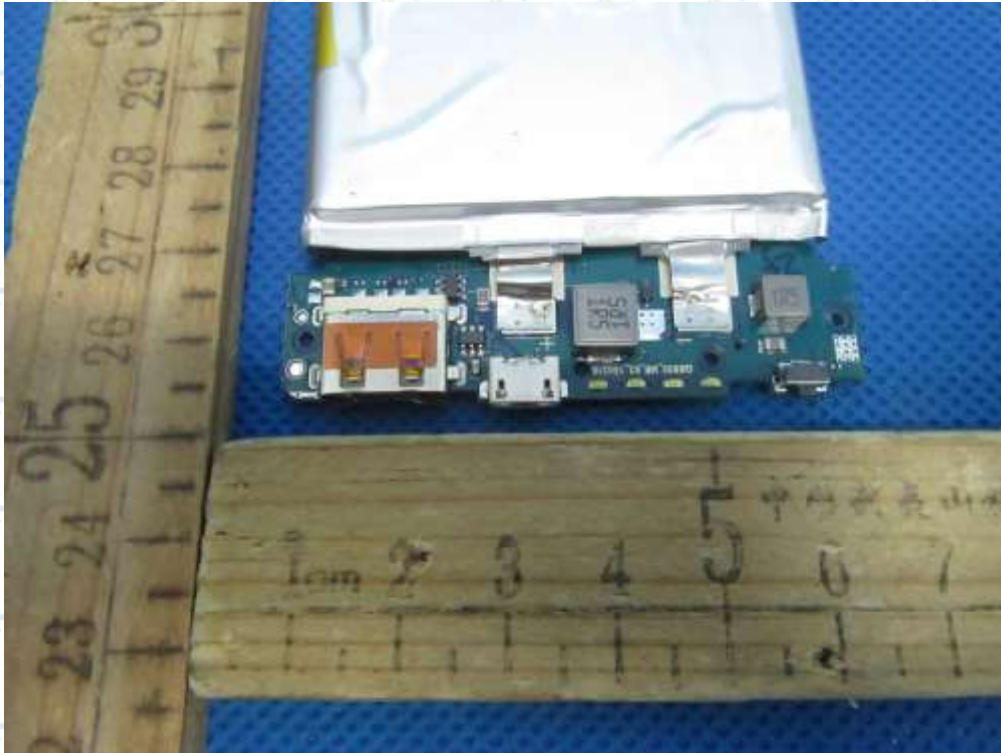


Photo 12



Photo 13



Photo 14

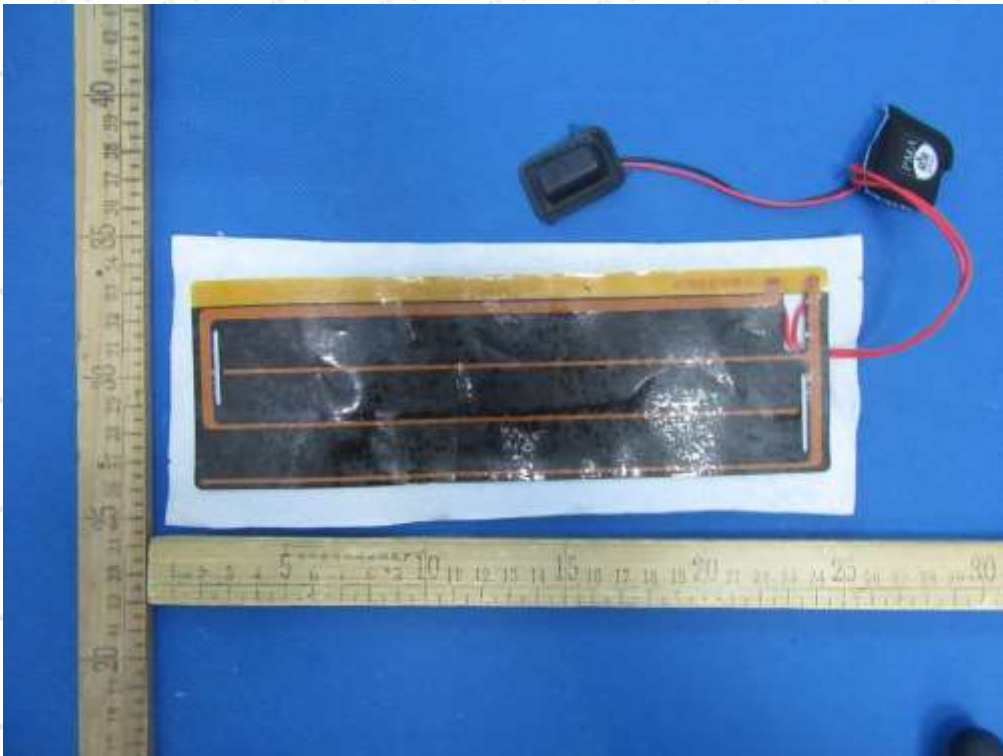


Photo 15

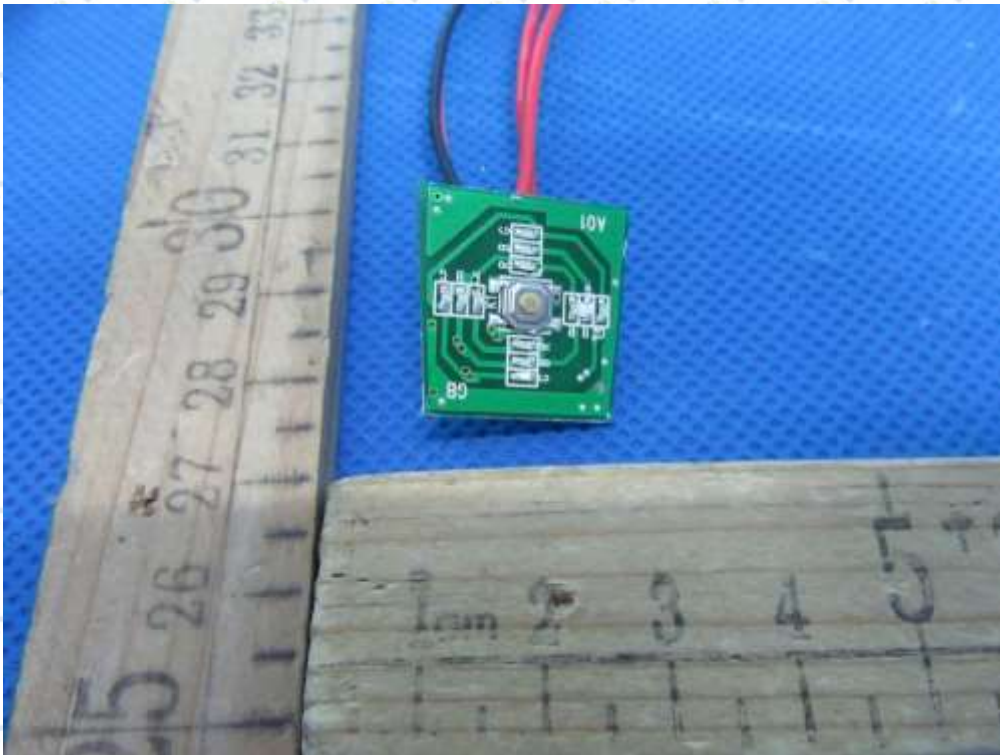


Photo 16

